

# JACK

## China No.1

Shanghai stock  
listed



Jack Wechat



Jack Facebook

**JACK SEWING MACHINE CO.,LTD.**

No.1008, Donghai Avenue East, jiaojiang District, Taizhou City, Zhejiang  
TEL: 0086-576-88177782 88177767  
FAX: 0086-576-88177787

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
[www.chinajack.com](http://www.chinajack.com)



“Make the service smarter  
Guide the industry future”





## ABOUT JACK

Jack Sewing Machine Co., Ltd was founded in 1995. Jack is a global company which focuses on industrial sewing machine, automatic cutter, power-saving motor, intelligent production management systems R&D, production and marketing. Jack has more than 7000 staff and listed on the main board of the Shanghai Stock Exchange (stock code: 603337).

After more than 20 years of operation and development, Jack has become the largest enterprise in the global sewing equipment industry. It is the only garment intelligent manufacturing complete solution service provider integrating pre-sewing, sewing and software. Products are sold to more than 130 countries around the world, serving the clothing, footwear, luggage, furniture, leather, automotive, aviation and other fields. In recent years, Jack has maintained a stable operation leading in global sales for 9 consecutive years.

Jack has established a large-scale research and development team of thousands of people, which has academician workstation, postdoctoral workstation, key enterprise research institute etc.. Jack introduces and adheres the IPD process and formed a relatively complete product development management system, with more than 1,000 effective patents.

Jack has successively won plenty of national honor, such as the manufacturing single champion model enterprise, China Industrial Award Nomination Award, National Technology Innovation Model Enterprise, National Enterprise Technology Center, National Torch Program key high-tech enterprises, National Intellectual Property Model Enterprise, China's top 50 light industry brands etc.

Jack has acquired German Bullmer, Italian MAICA, Italian VIBEMAC and Anhui TTY company. Through the domestic and foreign mergers and acquisitions to absorb and digest advanced technologies at home and abroad continuously, Jack has formed multi-site collaborative linkage of global R&D platform, such as Germany, Italy, Beijing, Hangzhou, Xi'an, Wuhan, Taizhou, Chizhou.

From "made in China" to "created in China", Jack will stand out in the international sewing equipment

industry:

To make it no difficulty to do garments manufacturing

And let the "intelligent manufacturing in China" led the world trend!

## CHINA NO.1

JACK vigorously promotes the integration of the two innovation, and enhance the ability to respond to the market changes quickly. With the corporate mission: provide the best sewing machinery with optimum cost-performance ratio to all, and the corporate spirit: harmony, honesty, struggling, rise, JACK keeping pace with the times, developing and innovating to follow up a new round of global industrial revolution, to build the "WISDOM FACTORY" with wisdom data, intelligent manufacturing and intelligence services, therefore making unremitting efforts to create "the NO.1 Sewing Machine Brand all Over the World".

JACK have got great achievement such as.

***NO.1 of Sewing Machine Industry in China Light Industry Comprehensive Evaluation;***

***No.1 of Export Sales for Consecutive Eight Years;***

***No.1 Sales in Quantity in Sewing Machine Field all Around the Word.***

JACK is worthy the title of "China No.1"





**MAKE CUSTOMER HAPPY**



ZARA

**BOSS**  
HUGO BOSS

**UNI  
QLO**

**Semir**  
森馬

**ETERNA**

*Bally Barclay*  
SHOE FASHION

**Metersbonwe**  
美特斯·邦威

**波司登**  
BOSIDENG  
HIGH QUALITY COSTUME

**adidas**

**NIKE**

**PUMA**

**LI-NING**

**PEAK**

**HLA**  
海澜之家

**浪莎**  
Langsha

报喜鸟  
SAINT ANGELO

**JUDGER**  
佳吉

**南极人**  
NANJIREN

**PEACBIRD**  
太平鸟集团

**LUOLAI**  
罗莱家纺

罗兰家纺

*Amer*  
爱慕

天堂伞业

**FEIZI**  
菲姿  
WOMEN'S WEAR

**HU BAO**  
CLASSIC  
虎豹男装

**EVER-GLORY**

**沛浪**  
PEI LANG

**大帝集团**  
MONNARCH GROUP

**YISHION** 以纯

**FAPA**  
法派

**千千万**  
kikiw'n

**帝牌男装**

**Yeba**  
黑豹集团

**宏达制衣**

**GBIQ**  
斯美泰包袋

**QIAOZHIWANG**  
Comfortable Wear  
乔治王

**洛兹集团**

**恒安集团**  
HENGAN

**ASIA LINK GROUP, INC.**  
联亚集团有限公司

**國人西服**  
GUOREN

**QINMAN**  
琴曼

**AOBENNI**  
奥奔妮

**GXG**  
GILL MIX GREEN

**PERTER TEVERE**  
派登服饰

**JODOLL**  
乔顿服饰

**洁丽雅**  
grace




# WONDERFUL JACK



## STRONG R&D STRENGTH


10 R&d Centre  
1000 members R&d team  
Nearly 1000 patents, leading the industry

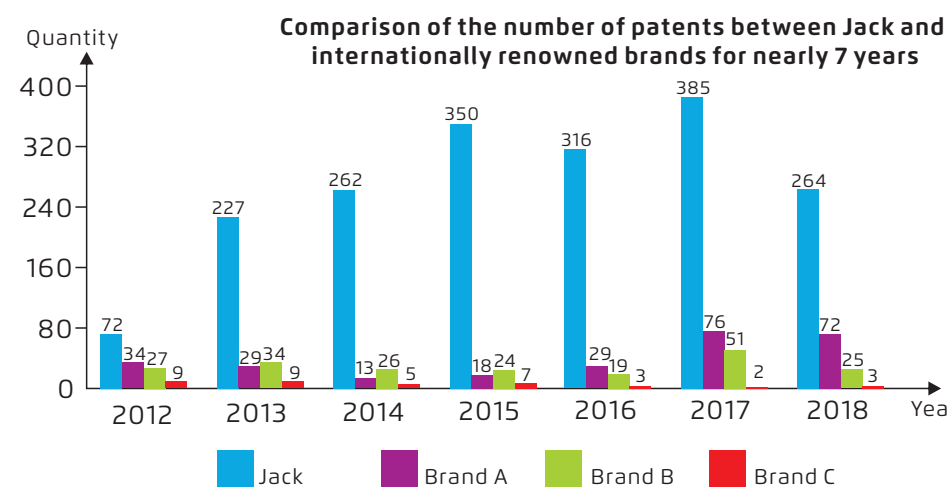

### R&D PATENT

Jack encourages innovation and continuously enhances the innovation of enterprises. Since 2012, the number of patents has been increasing. In 2016, 300 patents were applied, of which 210 were invention patents. The quality of patents and technological breakthroughs have been increasing year by year. The best in the industry.

## JACK HONOR

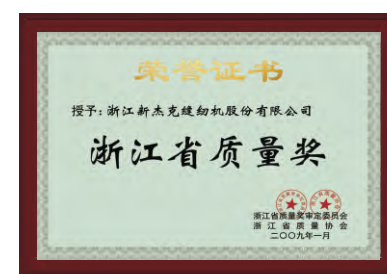

Zhejiang Quality Award



Zhejiang Manufacturing Certificate



Asian Design Award



Top 100 China Light Industry



Competitive Enterprises of National Intellectual Property



9000



14000



18000



## SALES NETWORK

JACK sales network located in more than 130 countries and has more than 5000 sales and service centre.







Supplier: ensure the quality and efficiency from the beginning.




Agent: ensure the service quality for end-user.



Apparel Industry: meet the commands and boost the industry upgrading.

**SMART SERVICE**

Build more than 5000 quick service centres in the future.

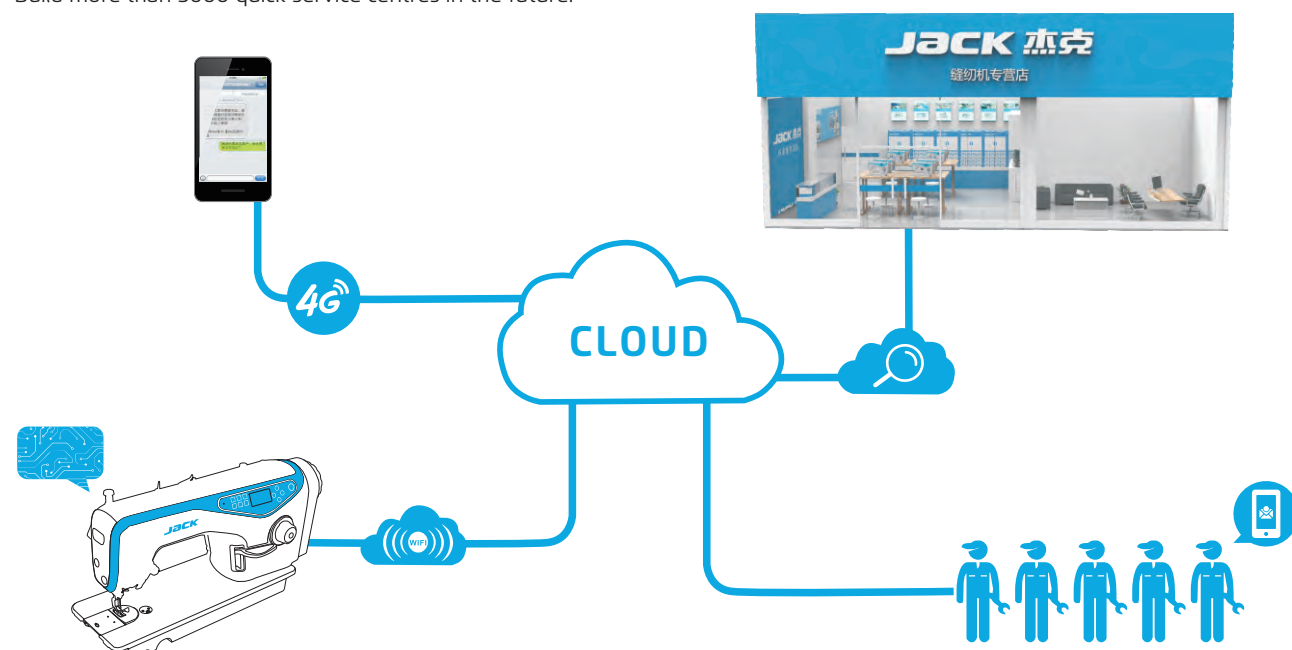

**ADVANCED EQUIPMENT: INTELLIGENT PRODUCING LINE**

The first intelligent line finishing production by investing 100 million RMB, no need manpower, increase efficiency, improve the product accuracy and ensure the high-quality.



**JACK A-SHARE LISTED COMPANY**




Successfully listed in Shanghai stock market




# Modely strojov JACK podľa účelu:

## Košele

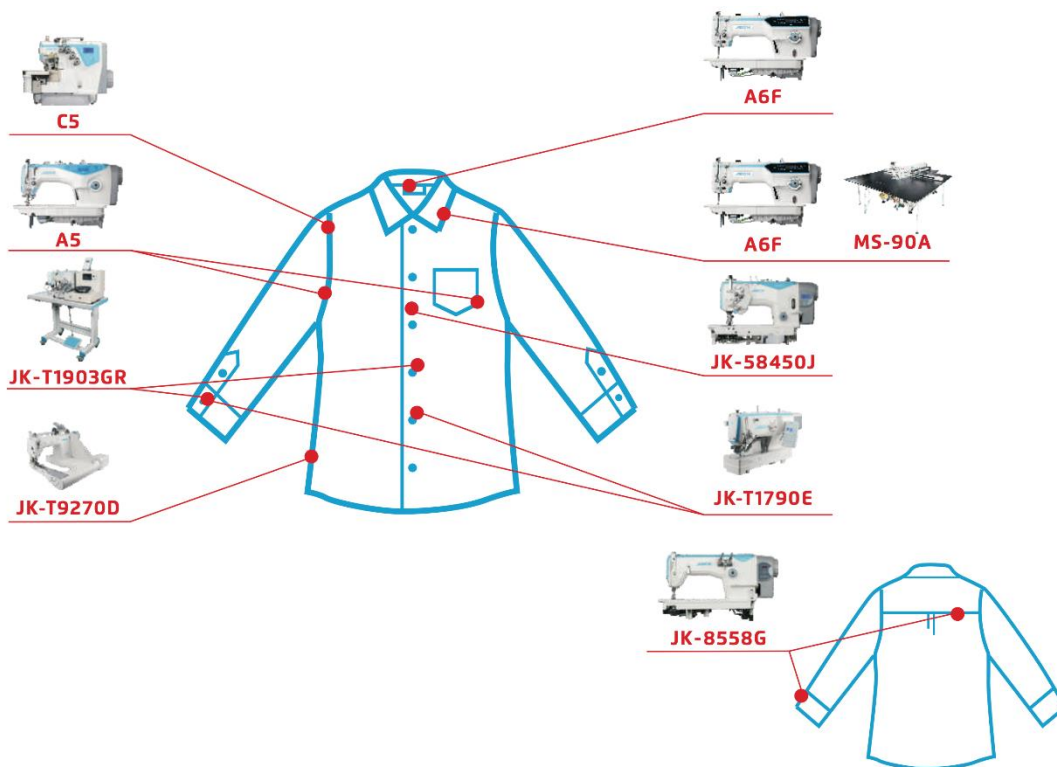


## Tričká s límčekom

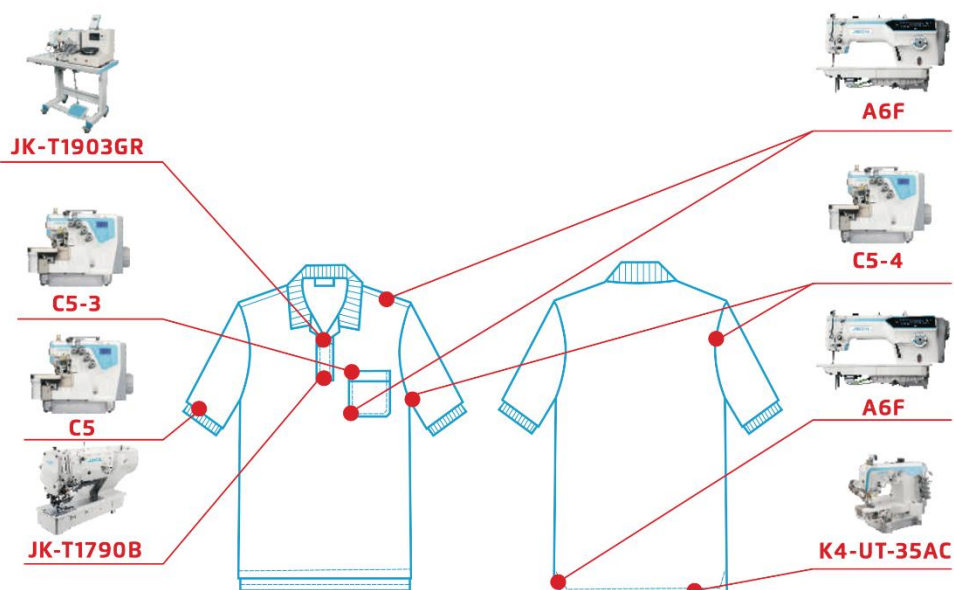




# Šaty

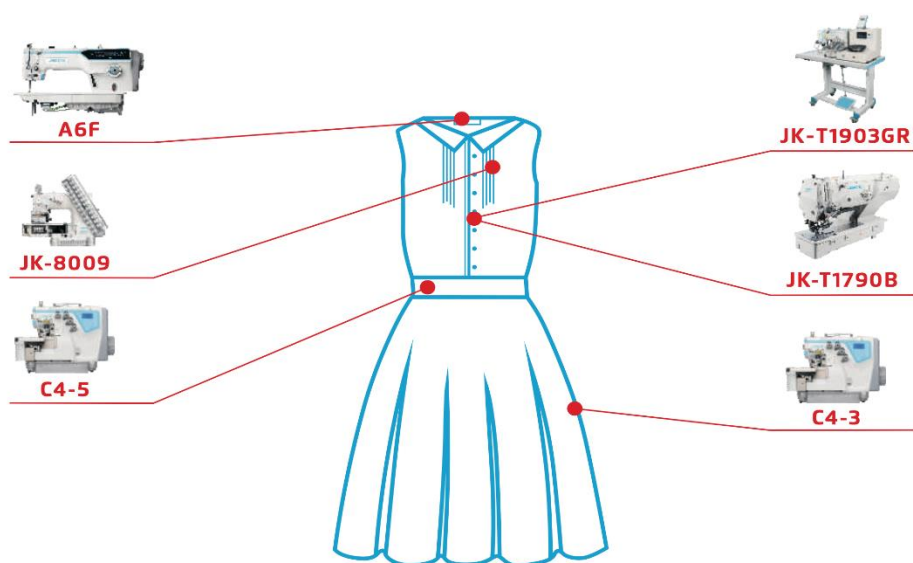


---

# Nohavice

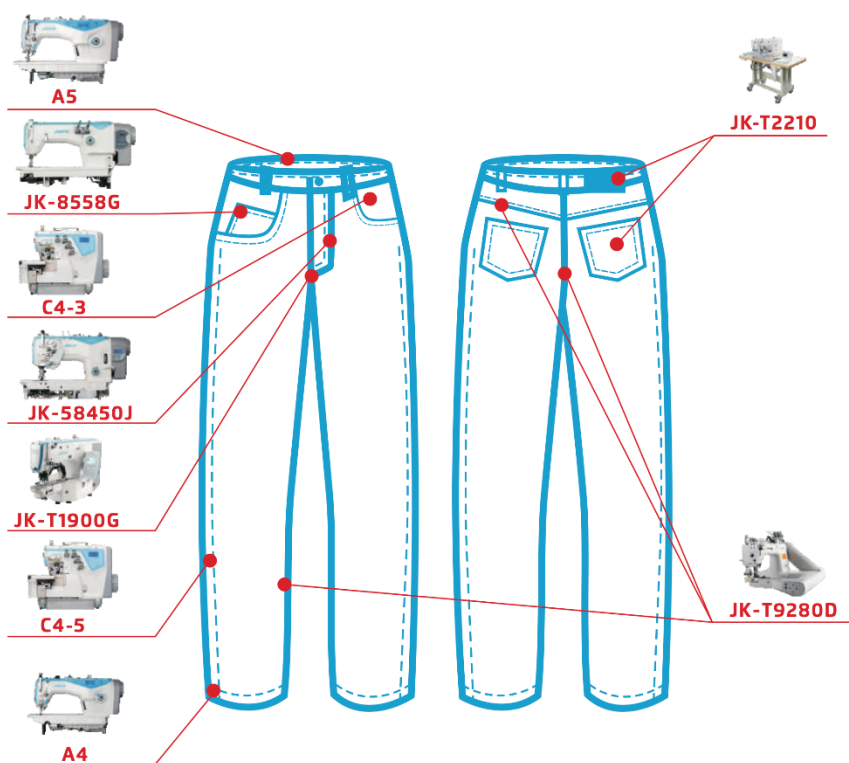




# Džínsy

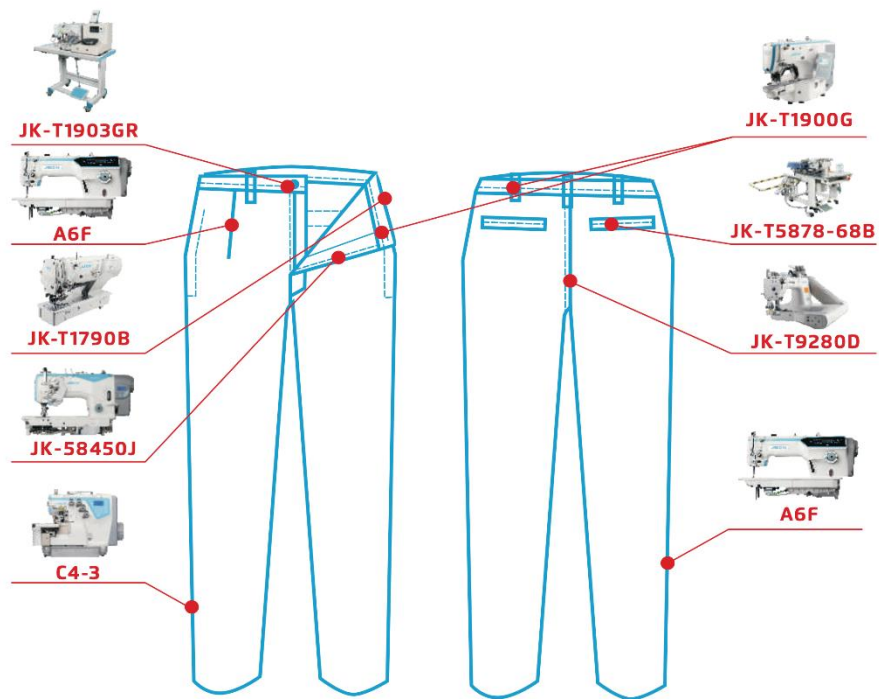


# Podprsenky

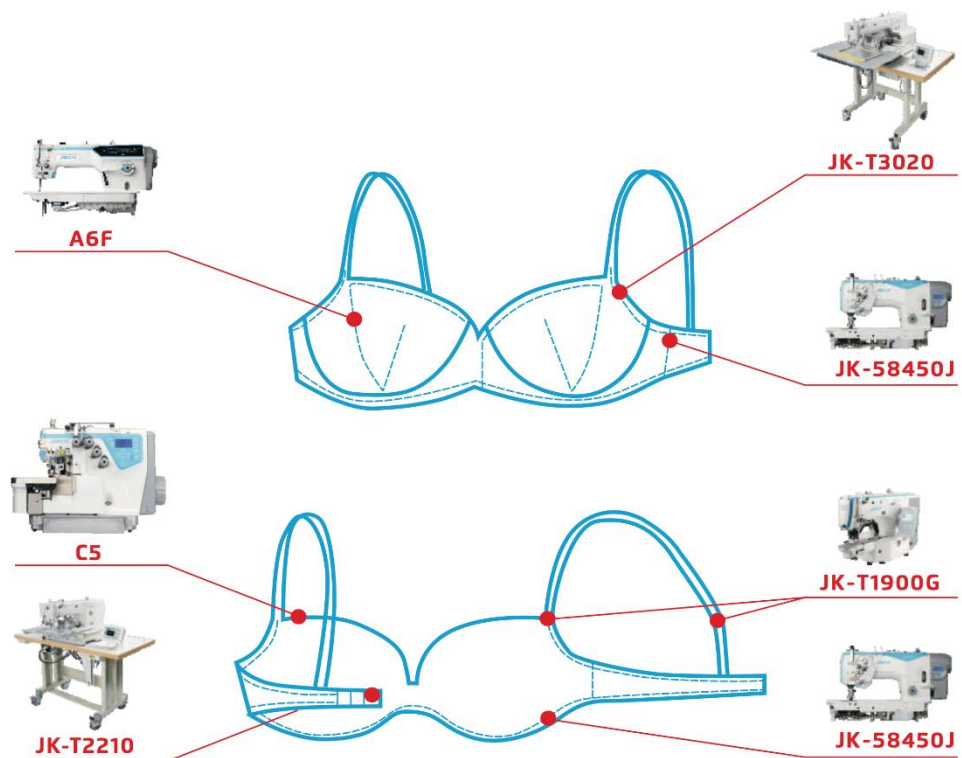




## Spodné prádlo

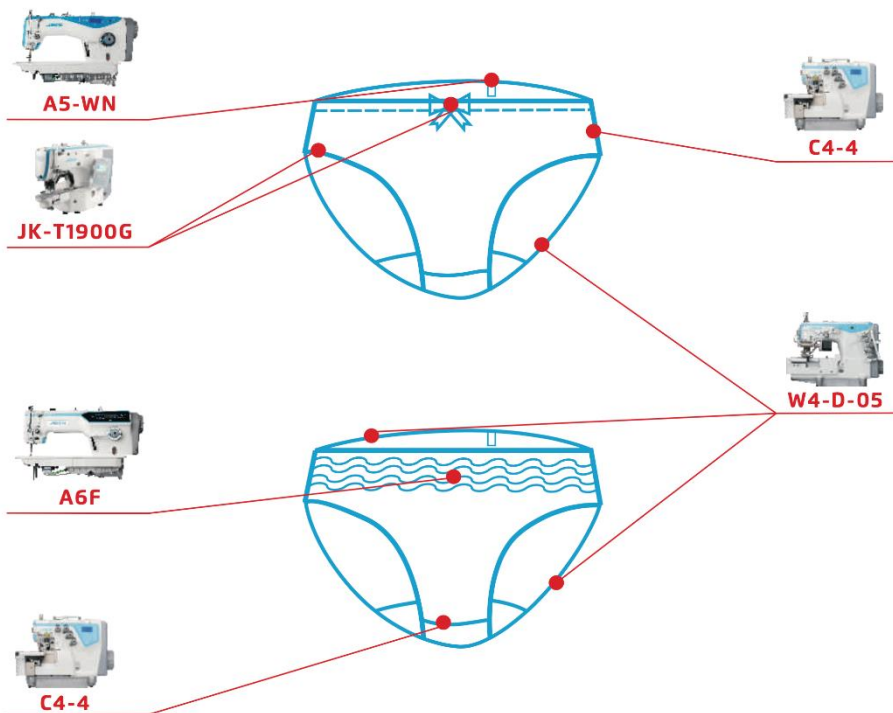

## Tašky

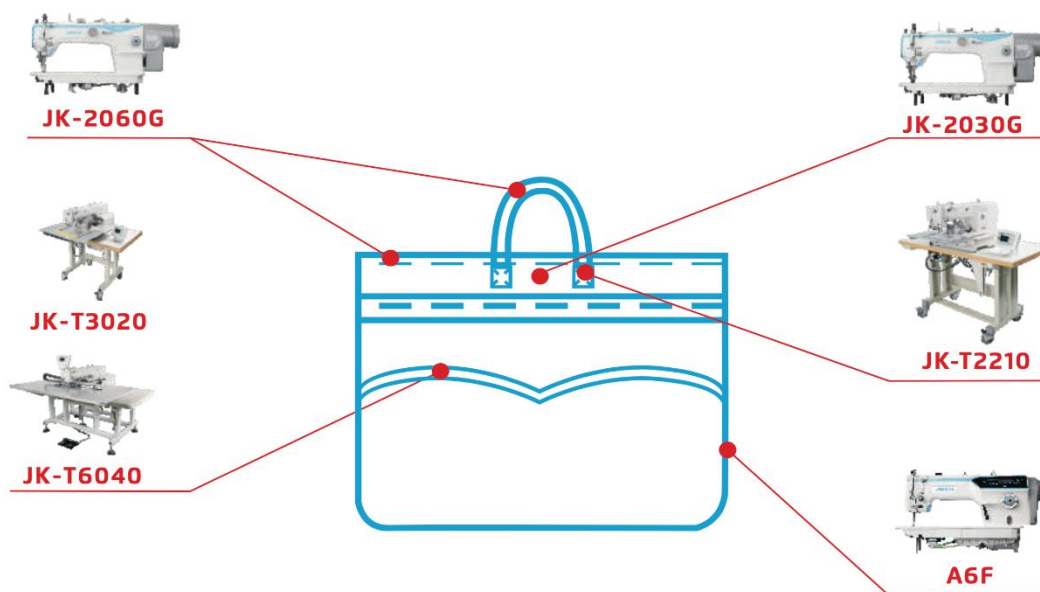



# Product list

## Lockstitch Machine Series

A5E Large Space Computerized Lockstitch Machine	03
A4E Quiet Computerized Lockstitch Machine	04
A6F Computerized Needle Feed Lockstitch Machine	05
A5-W Semi-dry Thread Cleanness Computerized Lockstitch Machine	06
A3 High Speed Computerized Lockstitch Machine	07
A2S High Speed Computerized Lockstitch Machine	08
A2 Automatic Trimmer Lockstitch Machine	08
F4 Power Saving Lockstitch Machine	09
JK-58450J Computerized Double Needle Lockstitch Machine	10
JK-5559G Semi-dry Computerized Lockstitch Machine With Edge Cutter	11
JK-8558G Power Saving Chain Stitch Machine	12

## Overlock Machine Series

C5S Thread Cleanness Pneumatic Automatic Overlock Machine	15
C5(Electric) Light And Heavy Quick Adjustable, Automatic Overlock Machine	16
C4 High Speed Automatic Overlock Machine	17
C3 High Speed Automatic Overlock Machine	18
E4S Adjustable Power Saving Overlock Machine	19
E3 Power Saving Overlock Machine	20
JK-797TDI Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine	21
JK-798TE Variable Top Feed Computerized Overlock Machine	22

## Interlock Machine Series

K5-UT Super High Speed Computerized Cylinder-bed Interlock Machine	27
W4-UT High Speed Computerized Flat-bed	28
JK-8670BDII-UT High Speed Computerized Small Cylinder-bed Interlock Machine	29

JK-8009VCDII/UTL High Speed Computerized Multi-needle Machine	30
JK-8740-460-02/D/AW/S 4 Needles 6 Thread Feed-off-arm Interlock Machine	31
JK-8787-01GX356/UT Cylinder-bed Interlock Machine	32
JK-8770-01GX356/UT Small Cylinder-bed Interlock Machine	32

## Special Machine Series

MS-90A Heavy Base Large-area pattern Sewing Machine	35
MG-60A Flexible Size Pattern Sewing Machine	36
Programmable Electronic Pattern Sewing Machine Series	37
JK-T5878-68B/78 Automatic Pocket Welting Machine	38
JK-T5878-58G Automatic Placket Setting Machine	39
JK-T9270D/9280D Direct Drive Feed-off-the Arm Machine	40
JK-T1900G Thread Cleanness High Speed Electronic Bar Tacking & Button Attaching Machine	41
JK-T1903GR Electronic Button Attaching Machine	42
JK-T1790B High Speed Electronic Lockstitch Buttonholing Machine	43
JK-T781E Integrated Electronic Lockstitch Buttonholing Machine	44
JK-T1377E Integrated Electronic Button Attaching Machine	45
JK-T373E Integrated Computerized button Attaching Machine	46

## Heavy-duty Machine Series

JK-2002G Large Needle Gauge Computerized Heavy-duty Lockstitch Machine	49
JK-2060G Compound Feeding Computerized Lockstitch Machine For Heavy-duty	50
JK-2030G Top & Bottom Feeding Computerized Lockstitch Machine For Heavy-duty	51
H5 Top Bottom Feeding Computerized Lockstitch Machine For Heavy-duty	52
S5 High Speed Computerized Post Bed Roller Feed Sewing Machine	53
JK-6891/6892 Intelligent Control Computerized Post Bed Roller Feed Sewing Machine	54
JK-6691/6692 High Speed Computerized Post Bed Roller Feed Sewing Machine	55
JK-6681 Small Cylinder-bed Computerized Post Bed Roller Feed Sewing Machine	56

# Make the service smarter

Smart service is not only offering on-time after-sales service, but also helping operators to solve the problem with the intelligent human-computer interaction.



Lockstitch Machine Series




# A5E

Large Space Computerized Lockstitch Machine



Large Space, High Precision Stitch, Short Thread Remaining

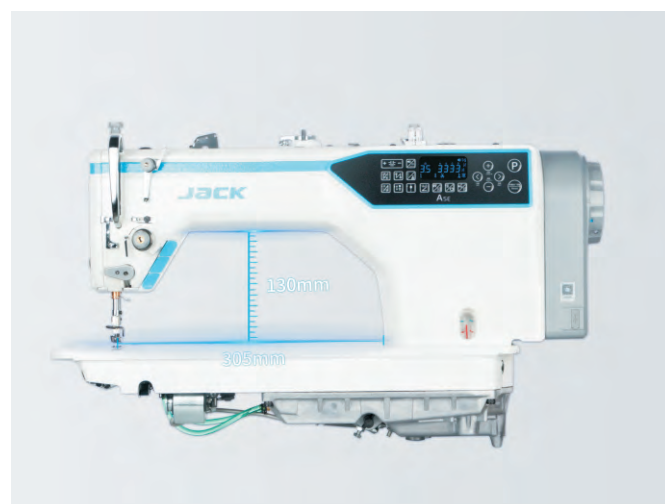

The Largest Operation Space 305mmx130mm; Give Sewing More Imagination




High Precision Stitch




Sealed Oil Pan

No Oil No Trouble, Clean And Durable



Beautiful Stitches, Short Thread Remaining



Variable Stitches, Fashionable And Beautiful

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Light/Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A5E	DBx111-18#	2	5	5-13	5000	√		690x295x550	42.5/48.5
A5E-H-M	DBx111-18#	2	5	5-13	5000	√		690x295x550	42.5/48.5
A5E-H	DPx5 18-21#	2	5	5-13	3500		√	690x295x550	42.5/48.5
A5E-7	DBx111-18#	2	7	5-13	3500	√		690x295x550	42.5/48.5


Note: Japanese hook, auto trimming, auto reverse sewing, auto presser foot lifter, electronic thread nipper, 5mm stitch length, 7mm stitch length is optional(-7).

# A4E


Quiet Computerized Lockstitch Machine




Low Noise, High Precision Stitch




High Stitch Overlapping Ratio



Noiseless Reverse Sewing



Variable Stitches, Fashionable and Beautiful



Short Thread Remaining



High Precision Stitch

Model	Needle	Thread Number	Max Stitch Length (mm)	Presser Foot Lifter Height (mm)	Max Speed (s.p.m)	Thin / medium thick	Thick material	Volume (mm)	Weight (kg)
A4E	DBx111-18#	2	5	5-13	5000	√	/	695x295x550	41/47
A4E-H-M	DBx111-18#	2	5	5-13	5000	√	/	695x295x550	41/47
A4E-H	DPx5 18-21#	2	5	5-13	3500	√	√	695x295x550	41/47
A4E-CP	DBx111-18#	2	5	5-13	5000	√	/	695x295x550	41/47

Note: Japanese hook, auto trimmer, auto reverse sewing, auto presser foot lifter, electronic tension post, 5mm stitch length, 7mm stitch length is optional, p means multiples of 1.6 hook.

# A6F

Computerized Needle Feed Lockstitch Machine



Full-automatic, Needle Feed, Short Thread Remaining, Semi-dry



Short Thread Remaining

Smart panel



Large space

Sealed Oil Pan, No Oil, No Trouble

Needle feed; Avoid of layers offset


Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	H	Volume (mm)	Weight (kg)
A6F	DBx1 11-18#	2	4.5	5-13	4000	√		695×315×670	45/52
A6F-H	DPx5 18-21#	2	4.5	5-13	3500		√	695×315×670	45/52

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.



# A5-W

Semi-dry Thread Cleaness Computerized Lockstitch Machine  
Full-automatic; Short Thread Remaining; Semi-dry

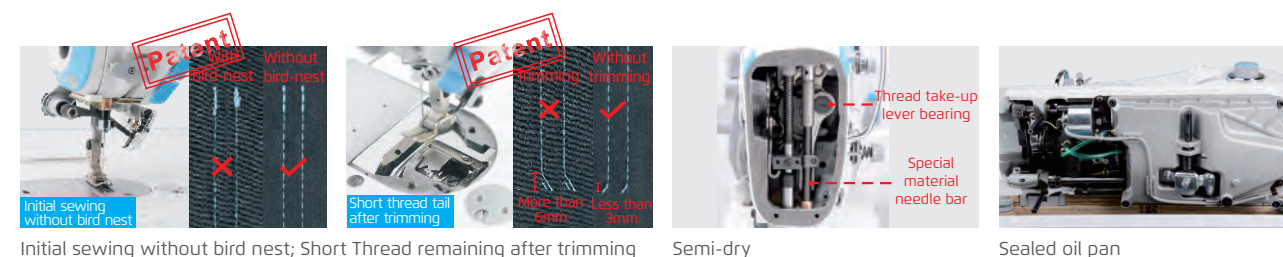

Initial sewing without bird nest; Short Thread remaining after trimming

Semi-dry

Sealed oil pan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A	M	Volume (mm)	Weight (kg)
A5-W	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A5-W-7	DBx1 11-18#	2	7	5-13	3500	√		645×248×550	40/46
A5-WH-M	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A5-WH	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A5-WD	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A5-WN	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A5-WND	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46


Note: auto thread trimming, auto reverse, auto presser foot lifter, and electronic thread tension are equipped as standard.  
D: bobbin thread detection is optional.  
N: less bird-nest device, pneumatic and electronic suction device are optional.






## A3


High Speed Computerized Lockstitch Machine  
Auto-trimmer; Auto-reverse



Suitable for light and heavy material



Factory reset



One main shaft



Cooling fan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	H	Volume (mm)	Weight (kg)
A3-CQ	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-CHQ-M	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-CHQ	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-CPQ	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-4C	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-4CH-M	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A3-4CH	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-4CPQ	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	40/46

Note: auto thread trimming, auto reverse, electronic thread tension are equipped as standard.  
-4: auto presser foot lifter.



## A2S

High Speed Computerized Lockstitch Machine  
Auto-reverse




## A2

Automatic Trimmer Lockstitch Machine  
Auto-trimmer

### A2S



New design



One main shaft



Factory reset



Cooling fan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	H	Volume (mm)	Weight (kg)
A2S-CZ	DBx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2S-CHZ-M	DBx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2S-CHZ	DPx5 18-21#	2	5	5-13	3500		√	671×248×550	34/41
A2S-4CZ	DBx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2S-4CHZ-M	DBx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2S-4CHZ	DPx5 18-21#	2	5	5-13	3500		√	671×248×550	34/41

Note: auto thread trimming, auto reverse, electronic thread tension are equipped as standard.  
-4: auto presser foot lifter.

### A2




Auto thread trimming



LED light



Cooling fan



Needle position

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	H	Volume (mm)	Weight (kg)
A2-CZ	Dbx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2-CHZ-M	DBx1 11-18#	2	5	5-13	5000	√		671×248×550	34/41
A2-CHZ	DPx5 18-21#	2	7	5-13	3500		√	671×248×550	34/41
A2-CHZ-7	Dpx5 18-21#	2	7	5-13			√	671×248×550	34/41

Note: auto thread trimming is equipped as standard.



## F4

Power Saving Lockstitch Machine



Power saving 71%

Convenient thread cutter

Needle position

LED light

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	H	Volume (mm)	Weight (kg)
F4	DBx1 11-18#	2	5	5-13	5000	√		645×248×550	32/38.7
F4-H	DPx5 18-21#	2	5	5-13	3500		√	645×248×550	32/38.7
F4-7	DBx1 11-18#	2	7	5-13	3500	√		645×248×550	32/38.7
F4-H-7	DPx5 18-21#	2	7	5-13	3500		√	645×248×550	32/38.7
F4-HL-7	DPx5 18-21#	2	7	5-13	3000		√	645×248×550	32/38.7

Note: L: Large hook.



## JK-58450J

Computerized Double Needle Lockstitch Machine  
Straight cutter; Auto cornering; Large space



For different thickness of thread

Straight knife

Split needle bar

Built-in presser foot lifter

Model	Needle	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Application	Function	Auto Corner Sewing	Large Hook	Volume (mm)	Weight (kg)
JK-58420B-003/JK-58420B-005	DPx5 11-16#/14-22#	4/5	6.4	7-13	3000	A/H	Straight Stitch			725×320×675	47.5/58
JK-58450B-003/JK-58450B-005	DPx5 11-16#/14-22#	5	6.4	7-13	3000	A/H	Corner Stitch			725×320×675	47.5/58
JK-58720B-003/JK-58720B-005	DPx5 11-16#/14-22#	7	6.4	7-13	3000	A/H	Straight Stitch	√		725×320×675	47.5/58
JK-58750B-003/JK-58750B-005	DPx5 11-16#/14-22#	7	6.4	7-13	3000	A/H	Corner Stitch		√	725×320×675	47.5/58
JK-58420J-403E/JK-58420J-405E	DPx5 11-16#/14-22#	4/5	6.4	7-13	3000	A/H	Straight Stitch			725×320×675	53/63
JK-58450J-403E/JK-58450J-405E	DPx5 11-16#/14-22#	5	6.4	7-13	3000	A/H	Corner Stitch			725×320×675	53/63
JK-58450J-413E/JK-58450J-415E	DPx5 11-16#/14-22#	5	6.4	7-13	3000	A/H	Corner Stitch	√		725×320×675	53/63
JK-58720J-403E/JK-58720J-405E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	A/H	Straight Stitch		√	725×320×675	53/63
JK-58750J-403E/JK-58750J-405E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	A/H	Corner Stitch		√	725×320×675	53/63
JK-58750J-413E/JK-58750J-415E	DPx5 11-16#/14-22#	7	6.4	7-13	3000	A/H	Corner Stitch	√	√	725×320×675	53/63


Note: 1.B is direct drive, Chinese hook is standard; the imported hook can be optional. 2.J is computerized, auto trimmer, auto reverse, auto presser foot lifter, auto wiper are as standard; the electronic thread tension is optional, the model is 403E/405E.





## JK-5559G

Semi-dry Computerized Lockstitch Machine With Edge Cutter  
Semi-dry; Coaxial driving

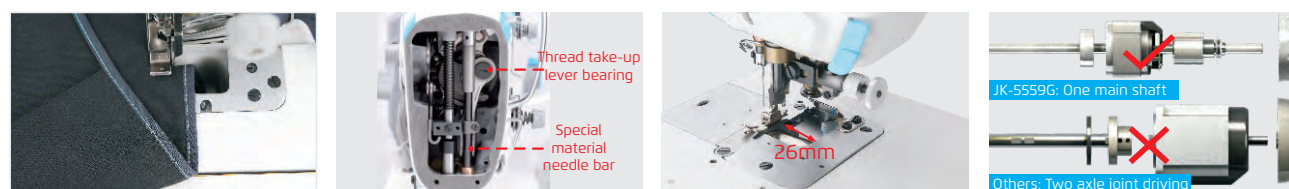

Edge cutter and tape binder (JK-5558G-T)

Semi-dry

Large space

One main shaft

Model	Needle	Thread No.	Stitch Length (mm)	Distance between Needle&Knife (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	A/M	Volume (mm)	Weight (kg)
JK-5559G-W	DBx1 11-18#	2	5	1/8"	5-13	5000	√	645×248×550	32/38.7
JK-5558G-W	DBx1 11-18#	2	5	1/8"	5-13	4000	√	645×248×550	32/38.7
JK-5558G	DBx1 11-18#	2	5	1/8"	5-13	4000	√	645×248×550	32/38.7
JK-5558G-WT	DBx1 11-18#	2	5	1.3/16"	5-13	4000	√	645×248×550	32/38.7
JK-5558G-T	DBx1 11-18#	2	5	1.3/16"	5-13	4000	√	645×248×550	32/38.7

Note: 1. JK-5559G-W is computerized type, semi-dry, auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.  
2. JK-5558G is direct drive type.  
3. W: dry head; T: with fabric edge cutter and tape binder.



## JK-8558G

Power Saving Chain Stitch Machine  
Power saving



Semi-dry

Auto presser foot lifter


Rear puller

Two needle gauges (JK-8560G)

Model	Needle Array	Needle Gauge	Needle	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	A	M	H	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-WTZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-1WZ	Single Needle	-	TVx7 14#	1	2	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ	Slant Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ-PL	Slant Three Needle	1/8	TVx7 18#	3	6	1.4-4	4.5 (knee Control 8-10)		√		4000	675×275×595	39/47
JK-8560G-PHWZ	Trigonal Three Needle	1/8	TVx7 21#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47

Note: T: auto presser foot lifter, 8558G/8560G: auto presser foot lifter is optional.  
PL: rear puller.  
PL(X): Rubber puller.





# Make the service smarter

Smart service is not only trouble shooting  
but also preventing the problems happening  
by the intelligent pre-warning system.

**Overlock Machine Series**




## C5S(Pneumatic)


Thread Cleanness Pneumatic Automatic Overlock Machine



Short Thread Remaining; Clean Sewing, Light and Heavy Adjustable, Stable and Durable

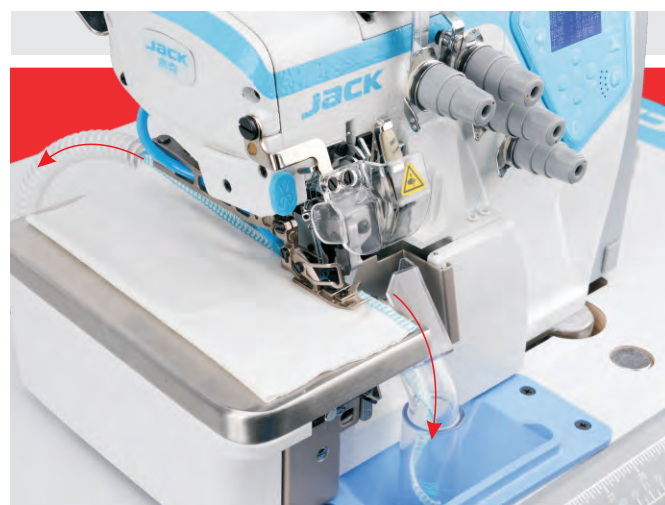


Thread Cleanness




Short Thread Remaining



Stable and Durable



Light and Heavy Adjustable, Wide Application



light (mesh&lace) medium (knitting) heavy (jeans)

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C5S-02x250/AT(Pocket Binding)	DCx27 14#	2	4	5	-	4	0.7-2	3.5	7000	525x360x630	33/44
C5S-3-02/233/KS(Plain Seaming)	DCx27 11#	1	3	-	4	4	0.7-2	5	7000	525x360x630	33/44
C5S-3-32R2/223/KS(Condense Seaming)	DCx27 9#	1	3	-	1.5	4	0.7-2	5	7000	525x360x630	33/44
C5S-WF-3-02/213/AT(Nonwovens)	DCx27 14#	1	3	-	4	8.5	-	5.5	7000	525x360x630	33/44
C5S-4-M03/333/KS(Plain Seaming)	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x630	33/44
C5S-4-M03/333/H/M/KS(Heavy Duty)	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x630	33/44
C5S-4-83/323/BK(Back Latching)	DCx27 11#	2	4	2	4	4.6	0.7-2	3.5	7000	525x360x630	33/44
C5S-MJ-4-53/233/AT(Towel Ending)	DCx27 11#	2	4	2	4	4	0.7-2	5	7000	525x360x630	33/44
C5S-5-53/233/AT(Strip Attaching)	DCx27 14#	2	5	3	5	4	0.7-2	5	7000	525x360x630	33/44
C5S-5-03/233/KH(5X5 Stitch)	DCx27 14#	2	5	5	5	4	0.7-2	5	7000	525x360x630	33/44
C5S-5-03/333/KH(3x4 Stitch)	DCx27 14#	2	5	3	4	4	0.7-2	5	7000	525x360x630	33/44
C5S-5-A04/435/AT(Extra Heavy)	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x630	33/44
C5S-5-M04/435/AT(Denim)	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x630	33/44
C5S-6-03/333/AT(Plain Seaming)	DCx27 11#	3	6	3x2	4	4	0.7-2	5	7000	525x360x630	33/44
C5S-6-M04/435/AT(Especially For Denim)	DCx27 19#	3	6	5x2.5	3.5	5	0.8-1.5	7	7000	525x360x630	33/44

Note: KS: Vertical suction device, KH: Horizontal suction device, AT: Pneumatic cutter trimming, H/M: Wide range for heavy duty; Optional C5W(Semi-dry).

## C5(Electric)


Light And Heavy Quick Adjustable, Automatic Overlock Machine




Suitable For Light To Heavy Duty, Short Thread Remaining, Faster




Thickness detection, strong climbing ability




Mesh sewing mode



Short thread remaining, no need to trim again



Ultra-fast start and stop, strong power

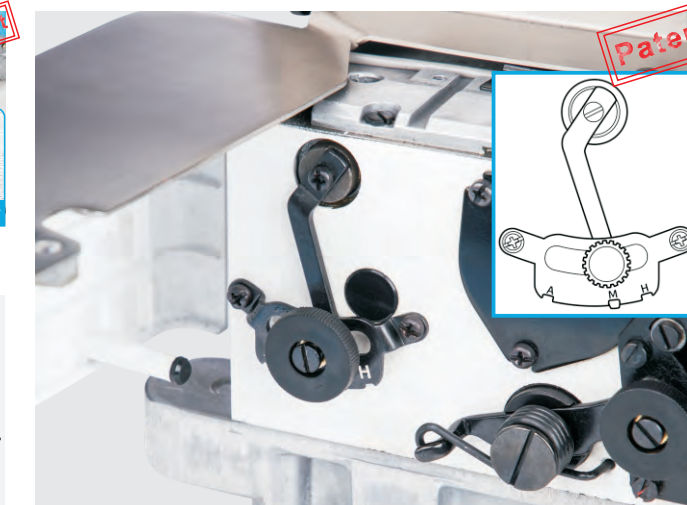

Light and Heavy Adjustable, Suitable for light to heavy duty


Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C5-02x250(Pocket Binding)	14#	2	4	5	-	4	0.7-2	3.5	7000	525*360*510	32/41
C5-3-02/233(Plain Seaming)	11#	1	3	-	4	4	0.7-2	5	7000	525*360*510	32/41
C5-3-32R2/223(Condense Seaming)	9#	1	3	-	1.5	4	0.7-2	5	7000	525*360*510	32/41
C5-WF-3-02/213(Nonwovens)	14#	1	3	-	4	8.5	-	5.5	7000	525*360*510	32/41
C5-4-M03/333(Plain Seaming)	11#	2	4	2	4	4.6	0.7-2	5.5	7000	525*360*510	32/41
C5-4-M03/333(Heavy Duty)	11#	2	4	2	4	4.6	0.7-2	6	7000	525*360*510	32/41
C5-MJ-4-53/233(Towel Ending)	11#	2	4	2	4	4	0.7-2	5	7000	525*360*510	32/41
C5-5-53/233(Strip Attaching)	14#	2	5	3	4	4	0.7-2	5	7000	525*360*510	32/41
C5-5-03/233(5X5 Stitch)	14#	2	5	5	5	4	0.7-2	5	7000	525*360*510	32/41
C5-5-03/333(3x4 Stitch)	14#	2	5	3	4	4	0.7-2	5	7000	525*360*510	32/41
C5-5-A04/435(Extra Heavy)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	32/41
C5-5-M04/435(Denim)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	32/41
C5-6-03/333(Plain Seaming)	11#	3	6	3x2	4	4	0.7-2	5	7000	525*360*510	32/41
C5-6-M04/435(Denim)	19#	3	6	5x2.5	3.5	5	0.8-1.5	7	7000	525*360*510	32/41

Note: H/M: Light and Heavy materials are good adaptability. SD is optional(start and end suction device), volume: 525x360x640(mm), weight:32/43(kg).




## C4

High Speed Automatic Overlock Machine  
Full-automatic; Electronic device; Oil-proof; Voice guide



High efficiency



Intelligent recognition of fabric thickness



Voice guide; One key to reset



Available to narrow and wide edge

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C4-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525x360x510	33/41
C4-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-12/233	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-32R2/223	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-WF-3-02/213	Non-woven Fabric	DCx27 14#	1	3	-	4	8.5	-	5	7000	525x360x510	33/41
C4-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x510	33/41
C4-4-M03/333/AD	Adjustable Side Stitch Width	DCx27 11#	2	4	2	4-8	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	33/41
C4-5-M04/435	Denim	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	33/41
C4-6-03/333	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	5	7000	525x360x510	33/41

Note: H/M: suitable for heavy and medium material. SD device is available (start and end suction device); volume: 525x360x640 (mm), weight 33/44 (kg).



## C3

High Speed Automatic Overlock Machine  
Auto-trimmer; Auto presser foot lifter; Oil-proof




Auto tread trimming



Oil-proof needle bar



One key to reset



One Main Shaft and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C3-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	4	0.7-2	5	5800	525x360x510	30/41
C3-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	5800	525x360x510	30/41
C3-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	5800	525x360x510	30/41
C3-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	4	0.7-2	5	5800	525x360x510	30/41
C3-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	4	0.7-2	5	5800	525x360x510	30/41
C3-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	5800	525x360x510	30/41



Note: H/M: suitable for heavy and medium material.





**E4S**

Adjustable Power Saving Overlock Machine  
Light and heavy adjustable freely, quick response for start and brake



Suitable for light and heavy material

Oil-proof needle bar

Easy to operate

One Main Shaft; Stable and fast


Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4S-2(Fabric Joint Seaming)	DCx27 11#	1	2	-	6	4	0.7-2	3.5	5500	525x360x510	28/36
E4S-02x250(Pocket Binding Seaming)	DCx27 14#	2	4	5	-	4	0.7-2	3.5	5500	525x360x510	28/36
E4S-3-02/233(Plain Seaming)	DCx27 11#	1	3	-	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-3-82/233(Back Latching)	DCx27 11#	1	3	-	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-3-32R2/233(Narrow Sewing)	DCx27 9#	1	3	-	1.5	4	0.7-2	5	5500	525x360x510	28/36
E4SWF-3-02/213(Non-woven Material)	DCx27 14#	1	3	-	4	8.5	-	5.5	5500	525x360x510	28/36
E4S-4-M03/333(Plain Seaming)	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	5500	525x360x510	28/36
E4S-4-83/323(Back Latching)	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	5500	525x360x510	28/36
E4S-4-M03/333/H/M(Heavy Duty)	DCx27 11#	2	4	2	4	4.6	0.7-2	6	5500	525x360x510	28/36
E4SMJ-4-53/233(Towel Ending)	DCx27 11#	2	4	2	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-5-53/233(Tape Attaching Seaming)	DCx27 14#	2	5	3	5	4	0.7-2	5	5500	525x360x510	28/36
E4S-5-02A/233(Light material)	DCx27 11#	2	5	3	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-5-03/233(5x5 Stitch)	DCx27 14#	2	5	5	5	4	0.7-2	5	5500	525x360x510	28/36
E4S-5-03/333(3x4 Stitch)	DCx27 14#	2	5	3	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-5-M04/435(Especially For Denim)	DCx27 19#	2	5	5	6	5	0.8-1.5	7	5500	525x360x510	28/36
E4S-5-A04/435(Extra Heavy Duty)	DCx27 19#	2	5	5	6	5	0.8-1.5	7	5500	525x360x510	28/36
E4S-6-03/333(Plain Seaming)	DCx27 11#	3	6	3x2	4	4	0.7-2	5	5500	525x360x510	28/36
E4S-6-M04/435(Especially For Denim)	DCx27 19#	3	6	5x2.5	3.5	5	0.8-1.5	7	5500	525x360x510	28/36

Note:H/M suitable for light and heavy; optional device KS (vertical suction device) and KH(horizontal suction device); machine volume:525\*360\*630(mm), weight 28/39(kg).



**E3**

Power Saving Overlock Machine  
Power saving, easy operation



Power saving 71%

Easy operation, quick response

Fully enclosed needle bar oil return device, clean sewing

Integrated handwheel design device

Model	Functions	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)	
E3-3-M1-15	Light material	9#	1	3	/	1.5	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-3-M2-04	Plain seaming	11#	1	3	/	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-3-M5-04/BK	Back latching	11#	1	3	/	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-4-M5-23/BK	Back latching	11#	2	4	2	3	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-4-M2-24	Plain seaming	11#	2	4	2	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-5-M2-35	Plain seaming	14#	2	5	3	5	4.6	0.7-2	5	5500	495x355x545	28.1/37.1
E3-5-M2-55	Heavy duty	14#	2	5	5	5	4.6	0.7-2	5	5500	495x355x545	28.1/37.1
E3-5x2-56	Extra Heavy Duty	19#	2	5	5	6	5	0.7-2	5	5500	495x355x545	28.1/37.1



## JK-797TDI

Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine  
Power saving; Small cylinder; Variable top feed



148mm cylinder bed



Differential feeding;  
Avoid of layers offset



Automatic extension device;  
Stable and high efficiency



One machine with multifunctions

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-797TDI-3-504-02/233N	DCx27 11#	1	3	-	4	3.8	0.8-1.8	5	7000	525X360X510	28/36
JK-797TDI-4-514-M03/333	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X510	28/36
JK-797TDI-4-514-M03/333/FR01	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/36
JK-797TDI-4-514-M03/333/FR02	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/40
JK-797TDI-4-514-M03/333/KS/FR01	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/39
JK-797TDI-4-514-M03/333/KS/FR02	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/43
JK-797TDI-4-514-M03/333/KS/FR05	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/43
JK-797TDI-4-514-M03/333/KS/FR06	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/43
JK-797TDI-4-514-M03/333/KS/FR09	DCx27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525X360X630	28/43

Note: 1. The parameters of small cylinder bed JK-797TDI series are the same with above parameters.

2. KS: pneumatic type (vertical), FR01: Pneumatic extension device; FR02: Mechanical extension device; FR05: Mechanical position adjustment, pneumatic extension device; FR06: Automatic position adjustment, pneumatic extension device; FR09: Fully automatic feeding, position adjustment, pneumatic extension device.



## JK-798TE


Variable Top Feed Computerized Overlock Machine  
Variable top feed; 798TE: automatic; 798TDI: power saving



Differential feeding;  
Avoid of layers offset



Auto thread trimming



Easy to adjust differential ratio



100% safety device

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-798TE-4-514-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	505x360x565	29.2/39.8
JK-798TE-4-514-A04/435	Extra Heavy Duty	DCx27 14#	2	4	2	4	7	0.8-1.5	6	6500	505x360x565	29.2/39.8
JK-798TE-5-516-M03/333	3x4 Stitch	DCx27 14#	2	5	3	4	4	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798TE-5-516-M03/233	5x5 Stitch	DCx27 14#	2	5	5	5	4	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798TE-5-516-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	6500	505x360x565	29.2/39.8

Note: super high speed direct drive overlock with differential ratio: JK-798TDI series.





# Overlock Process Device



Pocket Binding Seaming





C5-02X250

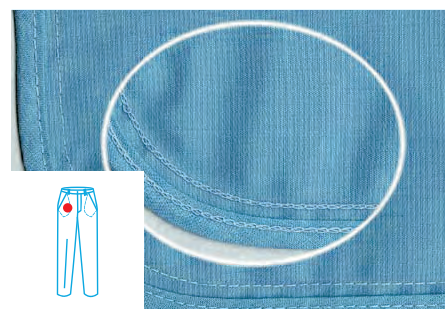


Tape Attaching Seaming



C5-5-53/233

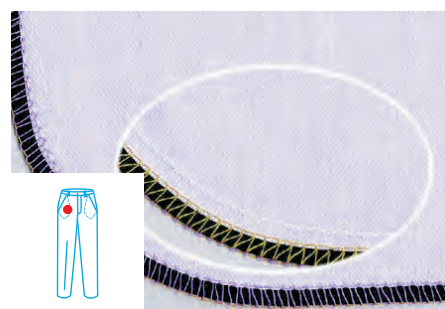

Towel Ending

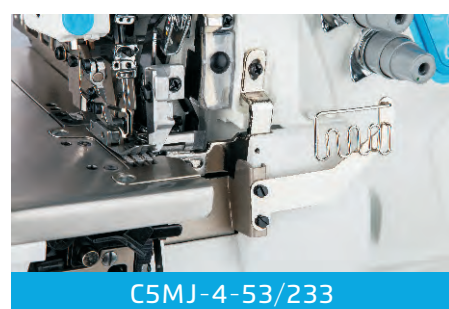


C5MJ-4-53/233



Non-woven Material



C5WF-3-02/213

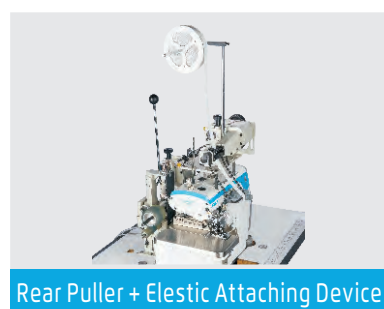

Rear Puller + Elastic Attaching Device




Rear Puller




Elastic Attaching Device



FR01 Pneumatic Extension Device



FR02 Mechanical Extension Device




FR06 Automatic Position Adjustment, Pneumatic Extension Device




FR09 Fully Automatic Feeding, Position Adjustment, Pneumatic Extension Device


# Overlock Process/Stitches Table




Fabric Joint Sewing  
E45-2

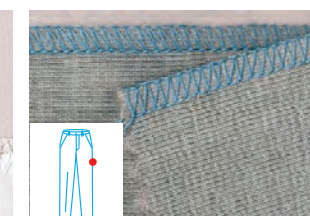

Three Threads Basic Stitch  
C5-3-02/233

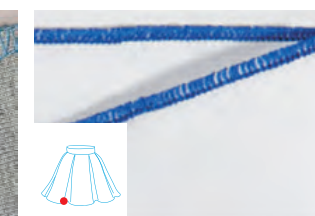


Three Threads Condense Seaming  
C5-3-32R2/223

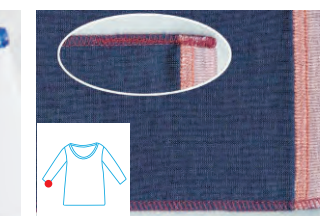

Three Threads Pneumatic Back Latch Seaming  
C5S-3-82/233/BK



Four Threads Pneumatic Back Latch Seaming  
C5S-4-83/323/BK

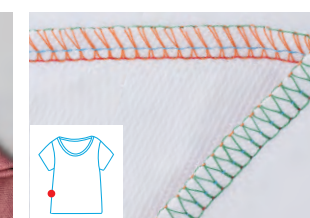


Four Threads Basic Stitch  
C5-4-M03/333




Five Threads Basic Stitch (5X5)  
C5-5-03/233




Five Threads Basic Stitch (3X4)  
C5-5-03/333



Five Threads Heavy Duty Stitch  
C5-5-M04/435

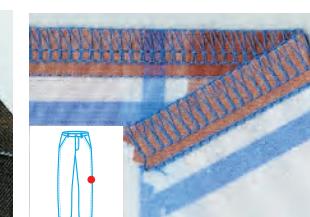

Six Threads Basic Stitch  
C5-6-03/333

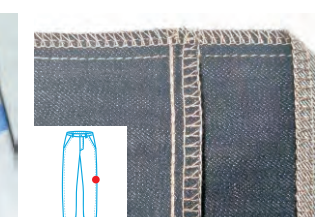

Six Threads Denim Stitch  
C5-6-M04/435



# Make the service smarter

Smart service is not only helping you to develop one quick-responding technician team, but also making the technician resources sharing possible by intelligent interaction platform.




## Interlock Machine Series





## K5

Super High Speed Computerized Cylinder-bed Interlock Machine  
High Speed, Stable, High yield




High Speed, High Yield




Wide adaptability of fabric



One key to reset, easy to operate



One main shaft, stable and fast

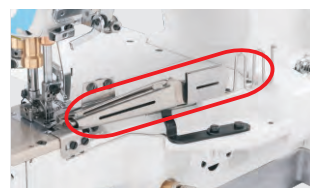

Tape binding



Covering stitch



Bottom hemming



PL: rear puller

Model	Needle	Needle No.	Thread No.	Stitch Width (mm)	Needle Gauge (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
K5-UT-01GB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5-UT-02GB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5-UT-03GB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5-UT-08AC	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5-UT-35AC	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×720	53/62
K5-D-01GB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K5-D-02BB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K5-D-03GB	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K5-D-08AC	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K5-D-35AC	UT128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×720	47/59

Note:



1.UT: computerized machine, standard: with thread wiper, without upper thread trimmer D: direct drive .  
2.UT type computerized machine is optional, standard: with thread wiper and upper thread trimmer; UTL pneumatic type computerized is optional (pneumatic thread trimming+ pneumatic foot lifter presser).

## W4


High Speed Computerized Flat-bed



Automatic Thread Trimmer



For Light and Heavy Fabric, Beautiful Stitches



Tape binding



Cover sewing



Hemming sewing



Basic sewing

One Machine Multi-functions, Wide Application

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
W4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	5500	670×445×595	54/64
W4-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	5500	670×445×595	48/58
W4-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	4000	670×445×595	48/58
W4-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-23GB	Plain Seaming (large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58
W4-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58
W4-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT2: computerized, D:direct drive.



## JK-8670BDII-UT

High Speed Computerized Small Cylinder-bed Interlock Machine  
Small Cylinder; Full-automatic



Small cylinder


Auto thread trimming

Out-moved thread cam

Cooling fan

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-8670BDII-01CB/UT	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BDII-03FB/UT	Covering Stitch(Flattening out)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BDII-03GB/UT	Covering Stitch(Folding over)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BDII-08AC/UT	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BDII-08BC/UT	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BDI-01CB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BDI-03FB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BDI-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BDI-08AC	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BDI-08BC	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54

Note: UT: computerized, D: direct drive.

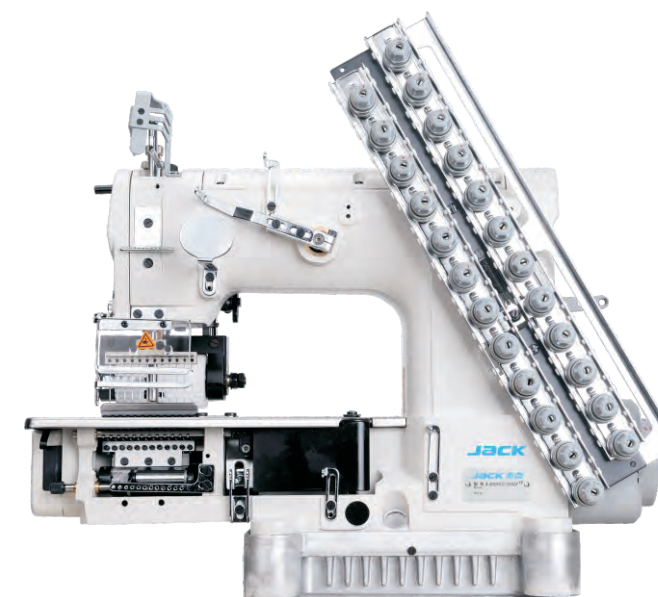

## JK-8009VCDII/UTL

High Speed Computerized Multi-needle Machine  
Power-saving; Wide Applications



Elastic attaching

Tape attaching

Shirt-fronting

Waist band JK-8009HF

Model	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-8009VCDII-04064P/04080P/04085P/04095P/UTL	U0113 14-16#	4	8	1.7-4.0	6.4/7.9/8.7/9.5	8	3500	615×400×605	52.5/57.5
JK-8009VCDII-06048P/06064P/06080P/06095P/UTL	U0113 14-16#	6	12	1.7-4.0	6.4/7.9/9.5	8	3500	615×400×605	52.5/57.5
JK-8009VCDII-08064P/08085P/UTL	U0113 14-16#	8	16	1.7-4.0	6.4/8.7	8	3500	615×400×605	52.5/57.5
JK-8009VCDII-12064P /UTL	U0113 14-16#	12	24	1.7-4.0	6.4	8	3500	615×400×605	52.5/57.5
JK-8009VCDII-13064-32P /UTL	U0113 14-16#	13	26	1.7-4.0	6.4	8	3500	615×400×605	52.5/57.5
JK-8009HF-04064-254P	TV×5 19-21#	4	8	1.7-4.0	6.4-25.4-6.4	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-04064P/04080P/04085P/04095P	U0113 14-16#	4	8	1.7-4.0	6.4/7.9/8.7/9.5	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-06048P/06064P/06080P/06095P	U0113 14-16#	6	12	1.7-4.0	4.8/6.4/7.9/9.5	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-08032P/08048P/08064P/08085P	U0113 14-16#	8	16	1.7-4.0	3.2/4.8/6.4/8.7	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-12032P/12048P/12064P	U0113 14-16#	12	24	1.7-4.0	3.2/4.8/6.4	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-13064-32P	U0113 14-16#	13	26	1.7-4.0	6.4-3.2	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-17032P	U0113 14-16#	17	34	1.7-4.0	3.2	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-23032P	U0113 14-16#	23	46	1.7-4.0	3.2	8	3500	615×400×605	52.5/57.5
JK-8009VCDI-25032P	U0113 14-16#	25	50	1.7-4.0	3.2	8	3500	615×400×605	52.5/57.5

Optional device:


UT: computerized, D: direct drive.

P (gear puller), PR (flat puller), VWL (front elastic feeding), VPL (tape attaching), VSF (shirt fronting), VPQ (elastic thread shirring).




# JK-8740-460-02/D/AW/S

4 Needles 6 Thread Feed-off-arm Interlock Machine

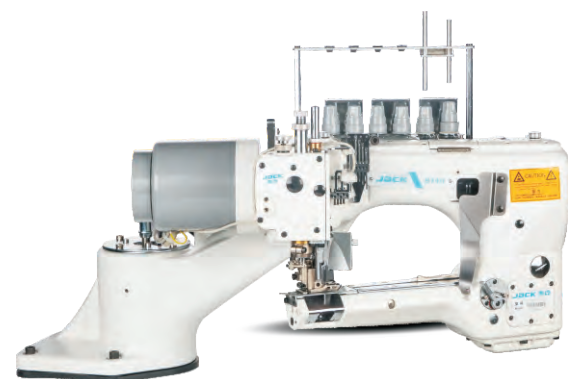


High Efficiency; Good Quality; Easy to Use

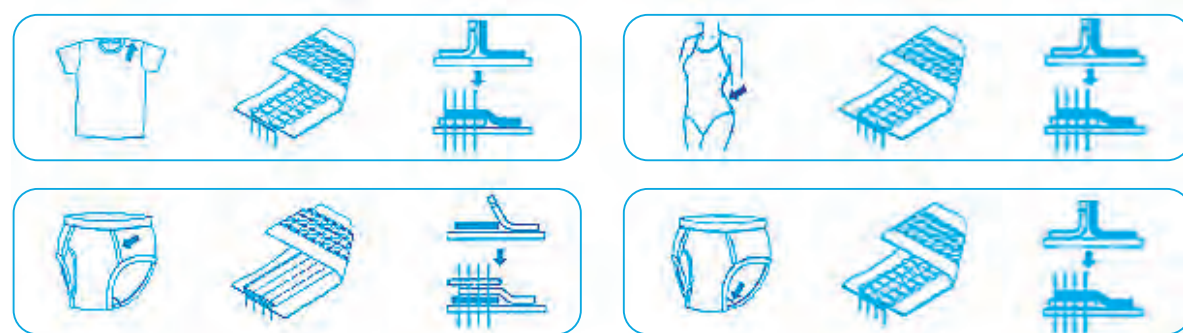


Large Operating Space Design

Model	Needles	Stitches	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Height(mm)	Needle Distance(mm)	Speed (S.p.m)	Optional Device	Suction Device	Procedure
JK-8740-01	4	6	4.8 5.2 6.0	1.6-2.5	1:0.7-1:0.5	6-8	30	3200	D UT UTL	AW1L AW1S AW2L AW2S	S DS T1 T2
JK-8740-02	4	6	6.4 7.0 8.0	1.6-2.5	1:0.7-1:0.5	6-8	30	3200			
JK-8740-02H	4	6		1.6-2.5	1:0.7-1:0.5	6-8	30	3200			

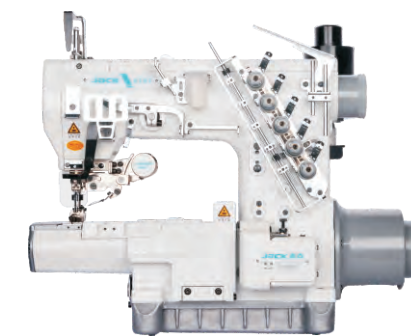

## JK-8787-01GX356/UT

Cylinder-bed Interlock Machine  
High Efficiency; Good Quality; Easy to Use

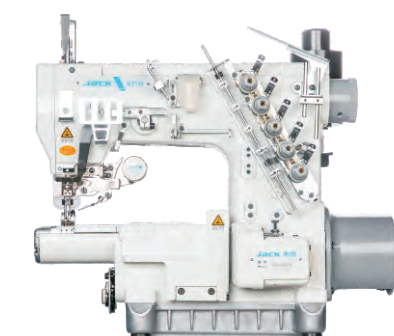

## JK-8770-01GX356/UT

Small Cylinder-bed Interlock Machine  
High Efficiency; Good Quality; Easy to Use

### JK-8787-01GX356/UT



Bobbin Threading Improved




Electromagnetic Presser Foot Lifter

Model	Stitch	Thread	Stitch Length	Stitch Width (mm)	Presser foot Height(mm)	Differential Ration	Speed (S.p.m)	Optional Device	Pulley
JK-8787-01GX356/UT	3	5	1.4-4.5	5.6	7	0.8-1.4	4500	D UT UT2 UTL	PL (gear wheel)
JK-8787-01GX354/UT	3	5	1.4-4.5	6.4	7	0.8-1.4	4500		
JK-8787-02BX356/D	3	5	1.4-4.5	5.6	7	0.8-1.4	4500		PR (Flat wheel)
JK-8787-02BX354/D	3	5	1.4-4.5	6.4	7	0.8-1.4	4500		

### JK-8787-01GX356/UT



Front Type Bobbin Thread Divider

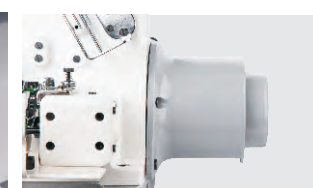

Mini Direct Drive Servo Motor


Model	Stitch	Thread	Stitch Length	Stitch Width (mm)	Presser Foot Height(mm)	Differential Ration	Speed (S.p.m)	Optional Device
JK-8770-01GX356/UT	3	5	1.4-4.5	5.6	7	0.8-1.4	4200	D UT UT2 UTL
JK-8770-01GX356X/UT	3	5	1.4-4.5	6.4	7	0.8-1.4	4200	

# Interlock Device and Stitches Table



Tape Binding

**K5-UT-02BB**

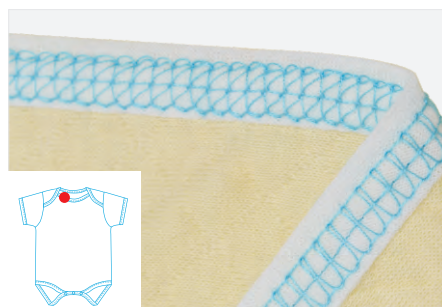



Covering Stitch

**K5-D-03GB**




Bottom Hemming

**K5-UT-08AC**

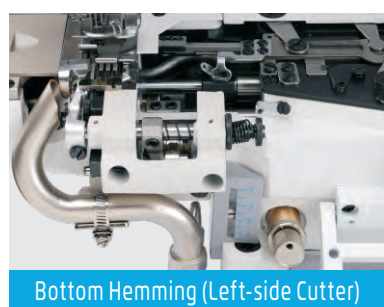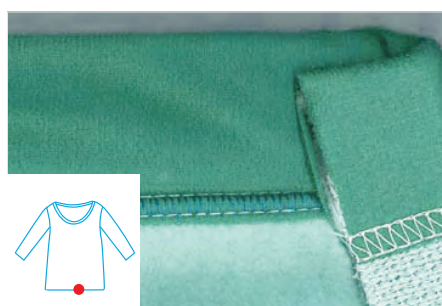

Bottom Hemming (Left-side Cutter)


**K5-UT-35AC**

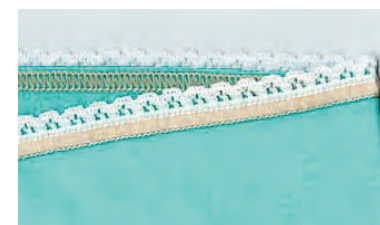

W4-D-05CB  
Elastic Lace Attaching  
(Right-side Cutter)



JK-8009VCDI/VPL  
Tape Attaching  
(Right-side Cutter)

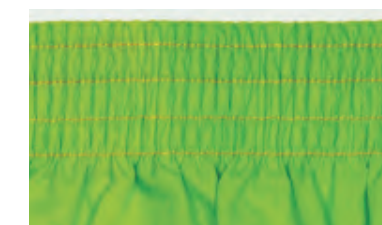

JK-8009VCDI/VWL  
Elastic Attaching(Pants)



JK-8009VCDI/VSF  
Placket Seaming (Shirt)



JK-8009VCDI/VPQ  
Simultaneous shirring (Dress)




JK-8009HF  
Waist Seaming (Jeans)



Device for Wide Sewing Bed



Four in One Sewing Bed

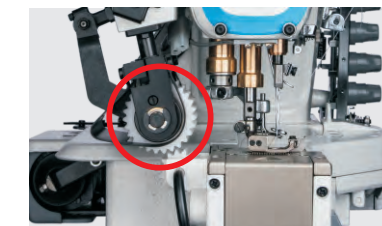

Rear Puller Device






**Special Machine Series**




## MS-90A


Heavy Base Large-area pattern Sewing Machine  
Polytechnic; Easy Operation; Stabilization




Moving Stable; Low Vibrati



Folding Sewing Table, Easy To Install



Various Big Presser Foot, Wide Range Of Application



Pattern Recognition

Model	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Presser Foot Lifting Height (mm)	Stitch Length (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
MS-90A-80S (double screw drive)	DP×5 8-16#	1	2	1400×800	15	1-5	3000	2440×1340×1420	727/860
MS-90A-81T (one screw drive)	DP×5 8-16#	1	2	1400×810	15	1-5	3000	2440×1340×1420	727/860
MT-90C-83T (double belt drive)	DP×5 8-16#	1	2	1400×830	15	1-5	3000	2160×1100×1350	527/620

Note: Optional: F10 is Auto-bobbin Change F11 is leaser cutting; F16 is draw point; F17 is leaser cutting suction



## MG-60A

Flexible Size Pattern Sewing Machine  
Flexible Size, multi Function, high Efficiency




Flexible Size, Easy To Adapt Different Process



Double Moving Knife



Intelligent Middle Presser Foot, Beautiful Stitch



FRID Pattern Recognition

Model	Needle	Needle No.	Stitch length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Sewing Range (mm)	Volume (mm)	Weight (kg)
MG-60A-40TSYX	D B×17-14#	1	1-5	12	3300	600×400	1650×1420×1325	260/320





## Programmable Electronic Pattern Sewing Machine Series

Full-automatic; Programmable  
High Efficiency



Wide range of application


Intelligent central presser foot

For heavy duty

Visual operation

Model	Optional Device	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1310	F1	DPx17 11-25#	1	2	130x100	22	2700	1220x840x1320	140/184 140/189(Reinforce)
JK-T2210	F1,F3,K	DPx17 11-25#	1	2	200x100	22	2700	1220x840x1320	142/186 142/191(Reinforce)
JK-T3020	F4,K,TDB	DPx17 11-25#	1	2	300x200	22	2700	1220x1220x1320	216/280 216/293(Reinforce)
JK-T6040	-	DPx17 11-25#	1	2	600x400	22	2500	1920x1620x1420	347/480 347/508(Reinforce)
JK-T10040	-	DPx17 11-25#	1	2	1000x400	22	2500	1920x1620x1420	367/500 367/528(Reinforce)

Note: 1. F1: flip presser foot, F3-2210sideslip presser foot, F4-3020sideslip presser foot, K: clamping device, TDB: pocket attaching.  
2. factory standard machine needle DPX17 19#.  
3. F1 F2 F3 F4 TDB equipment sewing range subject to actual.

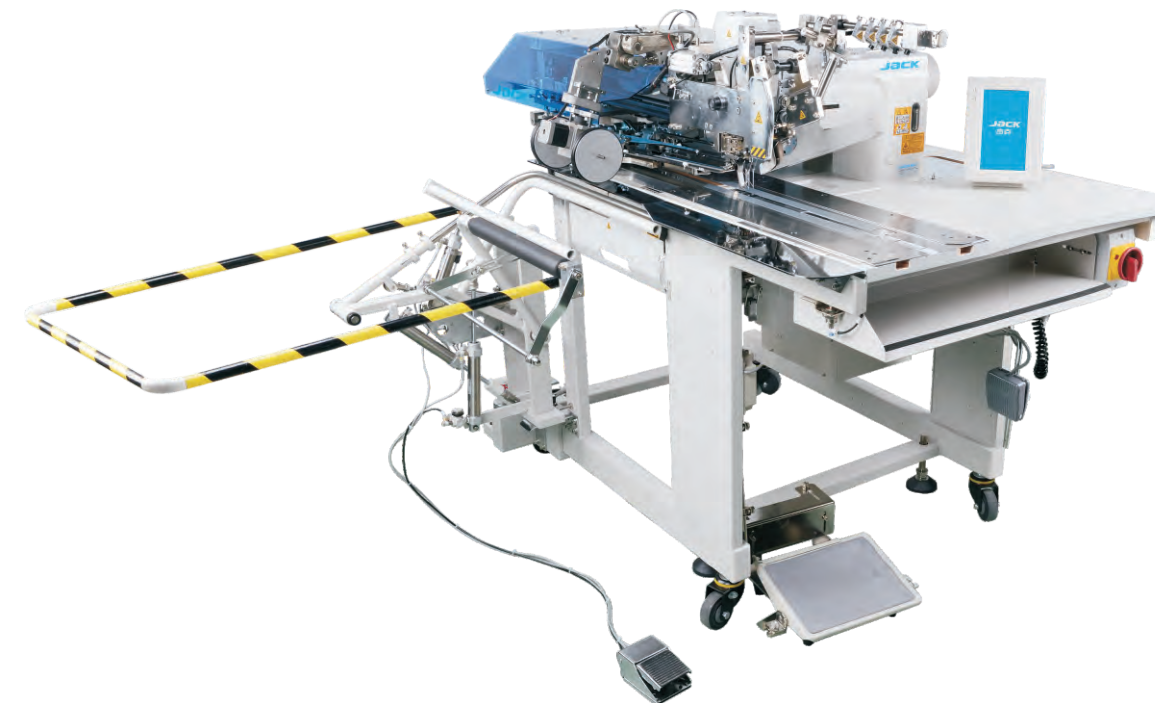

## JK-T5878-68B/78

Automatic Pocket Welting Machine  
Full-automatic; High Efficiency



High output

For different kinds of pocket

Automatic collective device


Easy to adjust; Precisely cutting

Model	Application	Needle	Stitch No.	Thread No.	Needle Gauge (mm)	Pocket Size (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-68B	Straight Pocket	Mtx190 14#-18#	2	3	8-20	18-220	3000	1600x1100x1500	240/350
JK-T5878-78	Slant Pocket	DPx17 14#-18#	2	3	8-20	18-220	3000	1600x1100x1500	240/350



## JK-T5878-58G

Automatic Placket Setting Machine  
Full-automatic; High Efficiency



High output



For different kinds of placket



Automatic collective




Laser positioning

Model	Application	Needle	Stitch No.	Thread No.	Sewing Width (mm)	Sewing Length (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-58G	T-shirt Placket	DBX111#	1	2	1-50	15-260	4000	2050×1050×1580	258/350



## JK-T9270D/9280D

Direct Drive Feed-off-the Arm Machine  
Mechatronic Wildely Using



Rear Puller lubricated design



Automatic Needle stopping



Double Needle Feed-off-arm Machine



Integrated, Power Saving

Model	Needle Gauge	Needle	Stitch No.	Thread No.	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Light Material	Medium Material	Heavy Duty	Heavier Duty	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T9270D-12-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-12-2PL-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-12-2PS-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-12-2PL-Q	3/16	TV×64 12#	2	4	4.2	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-13-Q	1/8	TV×64 12#	3	6	3.5	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-13-2PL-Q	1/8	TV×64 12#	3	6	3.5	8	√				3500	685×535×475	61.5/68.5
JK-T9270D-22-Q	1/4,3/16	TV×64 14#	2	4	3.5	8		√			3500	685×535×475	61.5/68.5
JK-T9280D-53-Q	1/8	TV×5 21#	3	6	4.2	10			√		3000	685×535×475	61.5/68.5
JK-T9280D-73-2PL-Q	1/8	TV×5 21#	3	6	4.2	10				√	3000	685×535×475	61.5/68.5
JK-T9280D-73-PL-Q	1/8	TV×5 21#	3	6	4.2	10				√	3000	685×535×475	61.5/68.5
JK-T9280D-73-PS-Q	1/8	TV×5 21#	3	6	4.2	10				√	3000	685×535×475	61.5/68.5

Note: PL: rear puller; PS: box puller; JK-T9270D-12-2PL-Q needle gauge is 4.2mm for sewing raincoats.





Short Thread Remaining




Normal Thread Remaining



## JK-T1900G

Thread Cleanness High Speed Electronic bar tacking & Button Attaching Machine  
One Machine, Multi Functions, High Efficiency, Short Thread Remaining




Simple and Intuitive, Easy to Operate



One Machine, Multi Functions



One Machine, Multi Functions



Cap hole Fishing nets

Model	application	Needle	Needle No.	Thread No.	Sewing range (X) (mm)	Sewing range (Y) (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1900GSK	Light and Middle Fabric	DPx5 16#	1	2	40	30	13	3200	805x405x525	55/64
JK-T1900GS	Light and Middle Fabric	DPx5 16#	1	2	40	30	13	3200	805x405x525	55/64
JK-T1900GHK	Heavy Fabric	DPx17 19#	1	2	40	30	13	2700	805x405x525	55/64
JK-T1900GH	Heavy Fabric	DPx17 19#	1	2	40	30	13	2700	805x405x525	55/64
JK-T1900GSXK	Short Thread Remaining	DPx5 16#	1	2	40	30	13	3200	805x405x525	55/64
JK-T1900GMK	Knitted Fabric	DPx5 11#	1	2	40	30	13	2700	805x405x525	55/64
JK-T1900GM	Knitted Fabric	DPx5 11#	1	2	40	30	13	2700	805x405x525	55/64
JK-T1900GY	Cap Hole	DPx5 16#	1	2	40	30	13	2700	805x405x525	55/64
JK-T1900GN	Fishing Net	DPx17 19#	1	2	40	30	13	2300	805x405x525	55/64
JK-T1900GL	Socks Sewing	DPx17 14#	1	2	40	35	13	2000	805x405x525	55/64
JK-T1906GS	Pattern	DPx17 14#	1	2	60	50	10	2700	805x405x525	55/64
JK-T1906GP	Elastic Attaching	DPx17 14#	1	2	60	50	10	2700	805x405x525	55/64

Note: Auto presser foot lifter, auto trimmer, auto wipper are standards. K: Bartacking and Button attaching can be transferred easily. X is short thread remaining.




## JK-T1903GR

Electronic Button Attaching Machine  
Automatic Button Feeding High Efficiency




Automatic button feeding



Wide range of application




Easy operation easy using




Pressure foot protection, safe and reliable

Model	application	Needle	Needle No.	Thread No.	Button diameter (mm)	Button size (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1903GSK	Basic Model	DPx17 14#	1	2	Φ8-Φ30	X:2.4-6.8 Y:2.4-6.8	10	2700	805x405x525	55/64
JK-T1903GR	Auto Button Feeding Device	DPx17 14#	1	2	Φ9-Φ22	X:2.4-6.8 Y:2.4-6.8	13	2700	1020x870x1390	131/177
JK-T1903GS	Button Attaching Machine	DPx17 14#	1	2	Φ8-Φ30	X:2.4-6.8 Y:2.4-6.8	10	2700	805x405x525	55/64

Note: Auto presser foot lifter, auto trimmer, auto wipper are standards. K: Bartacking and Button attaching can be transferred easily.



Short Thread Remaining




Normal Thread Remaining




## JK-T1790B

High Speed Electronic Lockstitch Buttonholing Machine  
Intelligent Convenient High Efficiency



Basting stitch



Continuously sewing (JK-T1790B)



Cutter driven by servo motor



Easy operation easy using

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Thread No.	Parallel Interspace (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T1790BS-1-D	Woven Material	25x4	DPx5 12#	1	1/4"-3/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BS-2-D	Woven Material	35x5	DPx5 12#	1	1/4"-1"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BS-3-D	Woven Material	41x5	DPx5 12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BSX-1-D	woven and short thread remaining	25x4	DPx5 12#	1	1/4"-3/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1791BS-D	Woven Material	70x5	DPx5 12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1792BS-D	Woven Material	120x5	DPx5 12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BK-1-D	Knitting Material	25x4	DPx5KN 11#	1	1/4"-3/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BK-2-D	Knitting Material	35x5	DPx5KN 11#	1	1/4"-1"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1790BK-3-D	Knitting Material	41x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1791BK-D	Knitting Material	70x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73
JK-T1792BK-D	Knitting Material	120x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	780x390x870	56/73

Note:Auto presser foot lifter, auto trimmer are standard.D is Dahao system; X is short thread remaining;K is bulge needle plate, only for knit




## JK-T781E

Integrated Electronic Lockstitch Buttonholing Machine  
Auto Presser Foot Lifter; Power Saving Efficiency



Auto thread trimming;  
Auto presser foot lifter



Power saving 71%



Easy to operate



Cooling fan


Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Needle No.	Automatic Thread Trimming	Automatic Presser Foot Lifter	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T781E-Q	Woven Material	22x4	DPx5 12#	1	1/4"-3/4"	2	✓	✓	12	3600	685x365x685	46/66
JK-T782E-Q	Woven Material	33x5	DPx5 12#	1	1/4"-1"	2	✓	✓	12	3600	685x365x685	46/66
JK-T783E-Q	Woven Material	40x5	DPx5 12#	1	1/4"-1 1/4"	2	✓	✓	12	3600	685x365x685	46/66
JK-T781EK-Q	Knitting Material	22x4	DPx5 12#	1	1/4"-3/4"	2	✓	✓	12	3600	685x365x685	46/66





## JK-T1377E

Integrated Electronic Button Attaching Machine  
Automatic; Easy Shift Efficiency




Three Patterns



Integrated, Power Saving  
And Environmental Protection



Lcd Operation Panel, Easy To Use




Eccentric Wheel Optimization,  
Operation More Stable

Model	Needle	Stitch No.	Thread No.	Button Diameter (mm)	Button Hole Size (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Direct Drive, Integrated	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1377E	TQ×116#	1	1	10-28	X(2.5~6.5) Y(0, 2.5~4.5)	√	√	√	9	1500	625×465×440	28.6/34.5



## JK-T373E

Integrated Computerized Button Attaching Machine  
Automatic Sewing, High Efficiency



Needle Protection, Safe Production



Lcd Operation Panel, easy To Use



Integrated, Power Saving And  
Environmental Protection



Applicable To Several Button  
Feeding Devices

Model	Needle	Stitch No.	Thread No.	Button Diameter (mm)	Button Hole Size (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T373E	TQ×116#	1	1	10~28	X(2.5~6.5) Y(2.5~6.5)	√	√	9	1500	625×465×440	28.6/34.5
JK-T373ER	TQ×116#	1	1	10~28	X(2.5~6.5) Y(2.5~6.5)	√	√	13	1500	1220×840×132	146/195



**Heavy-duty Machine Series**



# JK-2002G

Large Needle Gauge Computerized Heavy-duty Lockstitch Machine



Strong Feeding, Large Needle Gauge, Fast Speed

# JK-2060G


Compound Feeding Computerized Lockstitch Machine For Heavy-duty Full-automatic; Compound Feeding; Large Space



Strong Feeding; High Efficiency




Full Function Panel, Easy to Operate



Intelligent Double Switch



Super Large Needle Gauge, Suitable for Light and Heavy Duty



One Main Shaft




Compound feeding



For 8 layers of leather



Large space



Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2060GHC-3Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓		785x320x605	43/53
JK-2060GHC-4Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785x320x605	43/53

Model	Application	Needle	Thread number	Max needle gauge	Press footer height	Max speed (S.p.m)	Auto trimmer	Auto back stitch	Auto tension	Auto foot lifter	Volume (mm)	Weight (kg)
JK-2002GHC-3Z		DPx17 22#	2	8	7-16	3000	✓	✓	✓		725x285x580	37/45
JK-2002GHC-4Z	woolen	DPx17 22#	2	8	7-16	3000	✓	✓	✓	✓	725x345x580	43/51
JK-2002GHC-3Z-12	sweaters disposable slippers	DPx17 22#	2	12	7-16	2800	✓	✓	✓		725x285x580	37/45
JK-2002GHC-4Z-12	non-woven bags	DPx17 22#	2	12	7-16	2800	✓	✓	✓	✓	725x345x580	43/51
JK-2002BC-Z	hats	DPx17 22#	2	8	7-16	3000					725x285x580	37/43
JK-2002BC-Z-12		DPx17 22#	2	12	7-16	2800					725x285x580	37/43

Note: G means computerized B means Direct drive.



## JK-2030G


Top & Bottom Feeding Computerized Lockstitch Machine For Heavy-duty Full-automatic; Top And Bottom Feeding; Large Space




Top and bottom feeding



For 8 layers of leather



Large space



Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread No.	Needle Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2030GHC-3Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓		785×320×605	43/53
JK-2030GHC-4Q	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785×320×605	43/53
JK-2030GHC-4PQ	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785×320×605	43/53

Note: P means pneumatic presser foot lifter.




## H5


Top & Bottom Feeding Computerized Lockstitch Machine For Heavy-duty Strong Feeding, Easy To Use



Strong Feeding, High Efficiency



Sealed Shaft, No Oil No Trouble



One Main Shaft



One Key To Factory Reset

Model	Application	Needle	Thread No.	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Automatic Presser Foot Lifting	Volume (mm)	Weight (kg)
H5-CZ-3	Normal Material	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43
H5-CZST-3	Glove	Dp×5 11-17#	2	8	5-16	1800		725×285×580	40.5/43
H5-CZXB-3	Bag	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43
H5-CZZD-3	Cushion	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43
H5-CZ-4	Normal Material	Dp×17 20-23#	2	8	7.5-16	2200	✓	725×345×580	43/45.5
H2-CZ	Normal Material	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43
H2-CZ-12	Normal Material	Dp×17 20-23#	2	12	7.5-16	2200		725×285×580	40.5/43
H2-CZST	Glove	Dp×5 11-17#	2	8	5-16	1800		725×285×580	40.5/43
H2-CZXB	Bag	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43
H2-CZZD	Cushion	Dp×17 20-23#	2	8	7.5-16	2200		725×285×580	40.5/43

Note: H5 is computerized type with auto trimmer, auto reverse, thread tension, optional auto presser foot lifter(-4). H2 is direct-drive type.




# S5


High Speed Computerized Post Bed Roller Feed Sewing Machine




Beautiful Stitches, Quick Service, Easy to Use

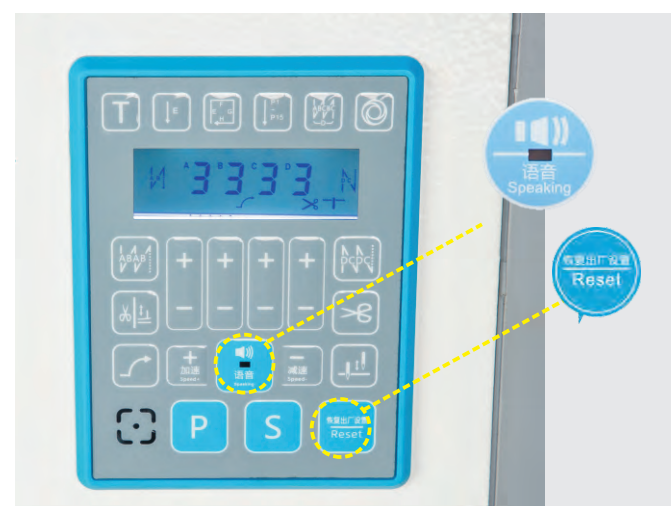

Built-in Panel, Easy to Operate



Intelligent control double USB



Aluminum Handwheel with Scale Ring



Stitch Overlapping Ratio 100%



Strong Feeding

Model	Max. Speed (S.p.m)	Needle	Presser Foot Lifter Height (mm)	Max. Stitch Length (mm)	Needle Bar Stroke (mm)	Automatic Thread Trimmer	Auto Backstitch	Auto Presser Foot Lifter	Short Tail	Volume (mm)	Weight (kg)
S5-91	3000	INDPX5#16	12	6.3	41	✓	✓	✓		812×375×724	67/76
S5-91CX	3000	INDPX5#16	12	6.3	41	✓	✓	✓	✓	812×375×724	67/76
S5-92	2000	INDPX5#16	12	4.1	41	✓	✓	✓		812×375×724	67/76

# JK-6891/6892

Intelligent Control Computerized Post Bed Roller Feed Sewing Machine



Feature: Beautiful Stitch, Intelligent And More Efficient



Step Motor Drive, Intelligent Operation



Quickly Adjust The Stitch Length



Integrated Control Box, High Efficiency



Repeated Stitch Rate Is 100%



Strong Puncture Ability


Model	Max. Speed (S.p.m)	Needle	Presser Foot Lifter Height (mm)	Max. Stitch Length (mm)	Needle Bar Stroke (mm)	Automatic Thread Trimmer	Auto Backstitch	Auto Presser Foot Lifter	Short Tail	Volume (mm)	Weight (kg)
JK-6891	3000	INDPX5#16	7/12	5	41	✓	✓	✓		812×375×724	75
JK-6891-X	3000	INDPX5#16	7/12	5	41	✓	✓	✓	✓	812×375×724	75
JK-6892	2000	INDPX5#16	7/12	5	41	✓	✓	✓		812×375×724	76

# JK-6691/6692

High Speed Computerized Post Bed Roller Feed Sewing Machine



Beautiful Stitch, Quick Service, Easier To Use

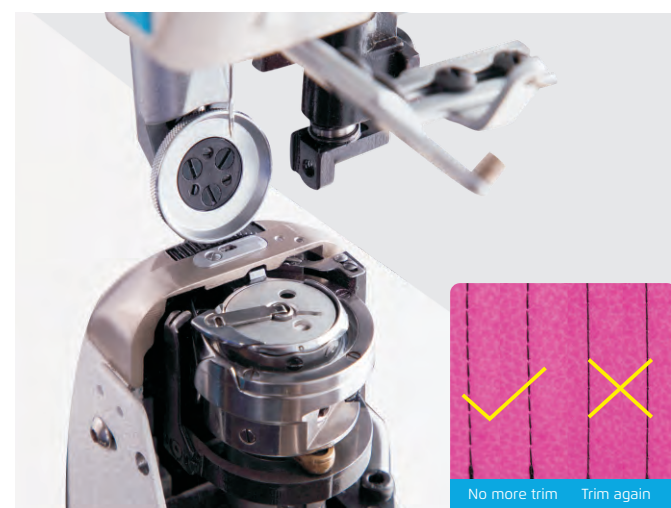

Short Thread Remaining (optional)



Voice Guide; One-key Factory Reset



Integrated Control Box , High Efficiency



Repeated Stitch Rate Is 100%



Strong Puncture Ability

Model	Max. Speed (S.p.m)	Needle	Presser Foot Lifter Height (mm)	Max. Stitch Length (mm)	Needle Bar Stroke (mm)	Automatic Thread Trimmer	Auto Backstitch	Auto Presser Foot Lifter	Short Tail	Auto Reverse	Volume (mm)	Weight (kg)
JK-6691	3000	INDPX5#16	7/12	5	41	✓	✓	✓			812×375×724	71
JK-6691-X	3000	INDPX5#16	7/12	5	41	✓	✓	✓	✓		812×375×724	71
JK-6691-1	3000	INDPX5#16	7/12	5	41	✓	✓	✓		✓	812×375×724	71
JK-6691-1X	3000	INDPX5#16	7/12	5	41	✓	✓	✓	✓	✓	812×375×724	71
JK-6692	2000	INDPX5#16	7/12	5	41	✓	✓	✓			812×375×724	72
JK-6692-1	2000	INDPX5#16	7/12	5	41	✓	✓	✓		✓	812×375×724	72

# JK-6681

Small Cylinder-bed Computerized Post Bed Roller Feed Sewing Machine



Beautiful Stitches, Quick Service, Easy to Use



Voice Guide; One-key Factory Reset



Integrated Control Box , High Efficiency



Repeated Stitch Rate Is 100%



Strong Puncture Ability




Flexible Operation and Strong Adaptability

Model	Max. Speed (S.p.m)	Needle	Presser Foot Lifter Height (mm)	Max. Stitch Length (mm)	Needle Bar Stroke (mm)	Automatic Thread Trimmer	Auto Backstitch	Auto Presser Foot Lifter	Short Tail	Auto Reverse	Volume (mm)	Weight (kg)
JK-6681	3000	INDPX5#16	7/12	5	41	✓	✓	✓			812×375×724	75
JK-6681-1	3000	INDPX5#16	7/12	5	41	✓	✓	✓	✓		812×375×724	75




# CONFIGURATION


## Shirt

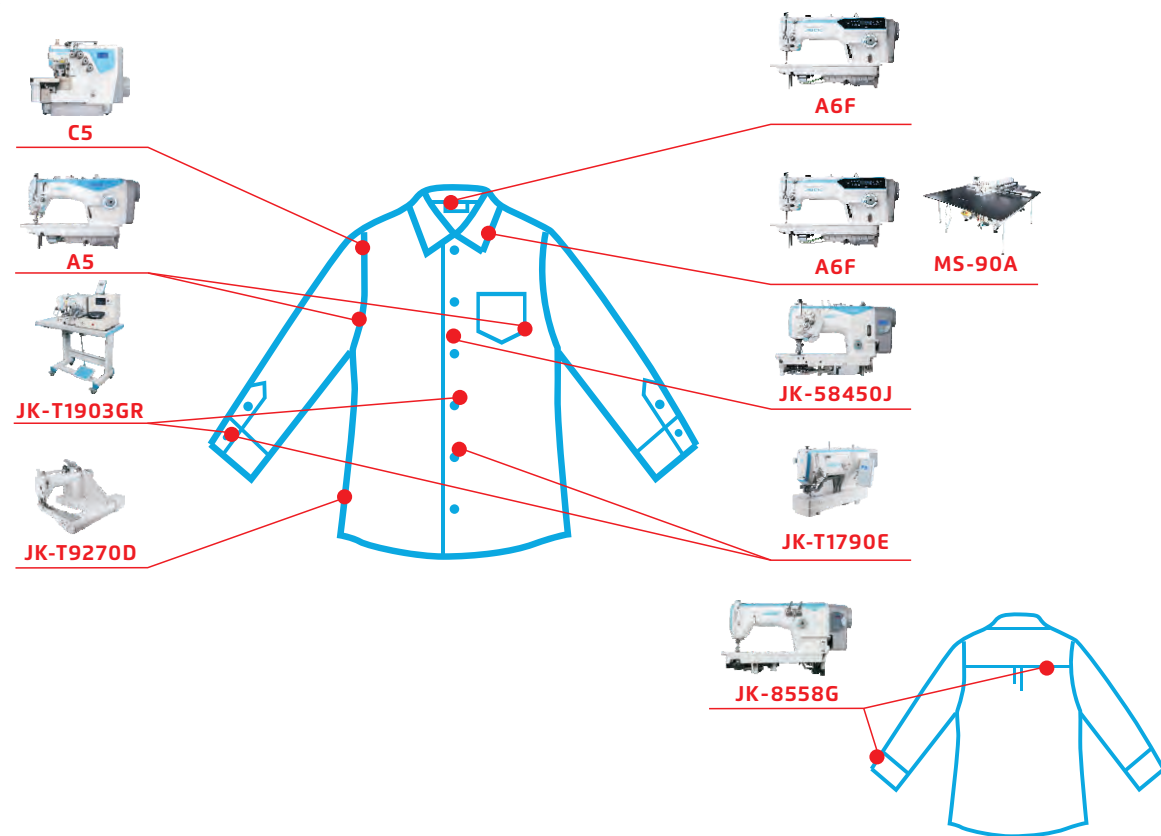


## Jeans

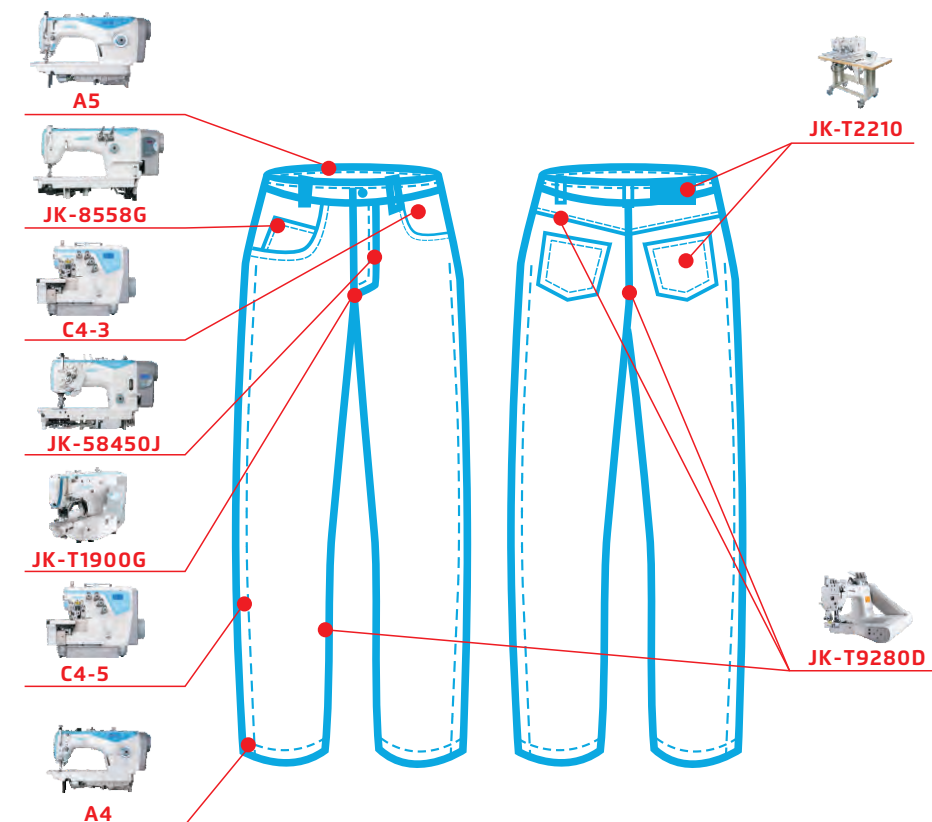


## Trousers

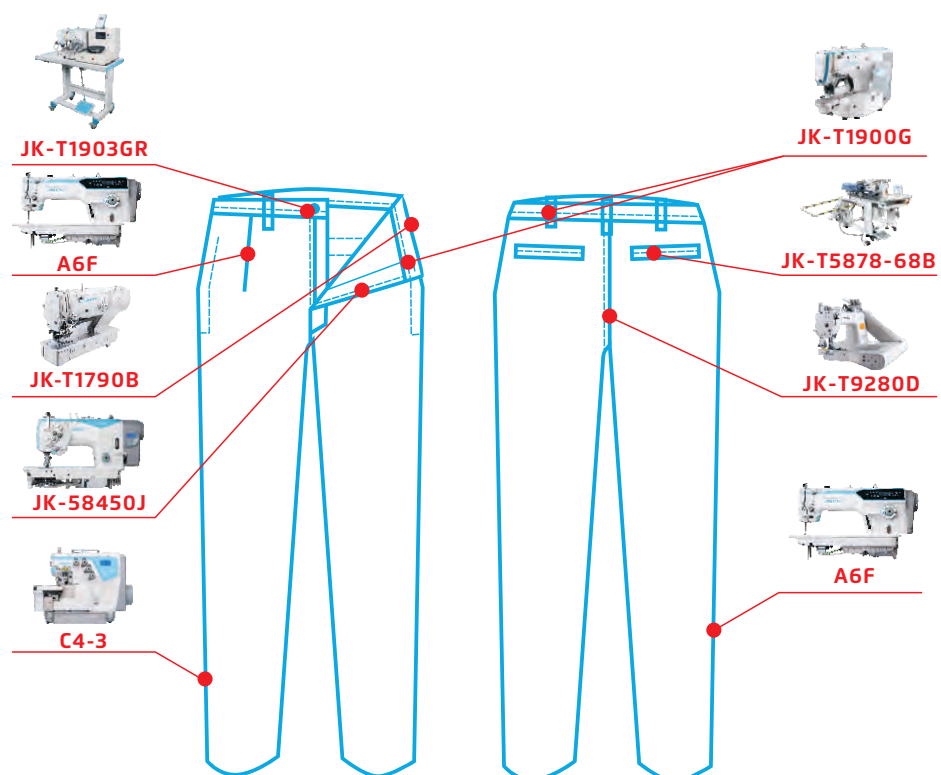


## Bra

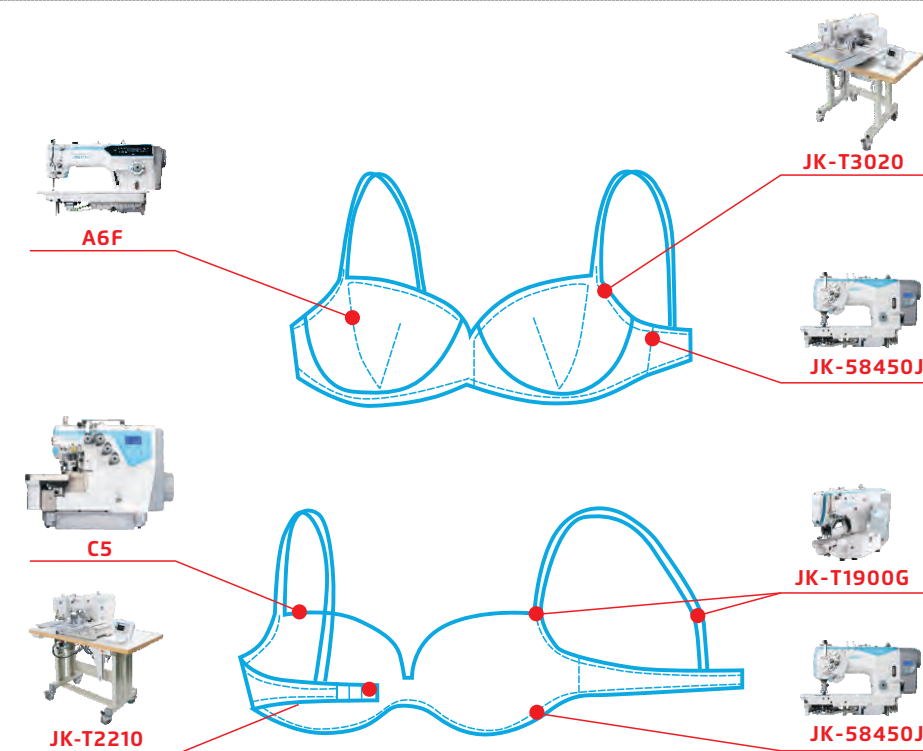


### Briefs

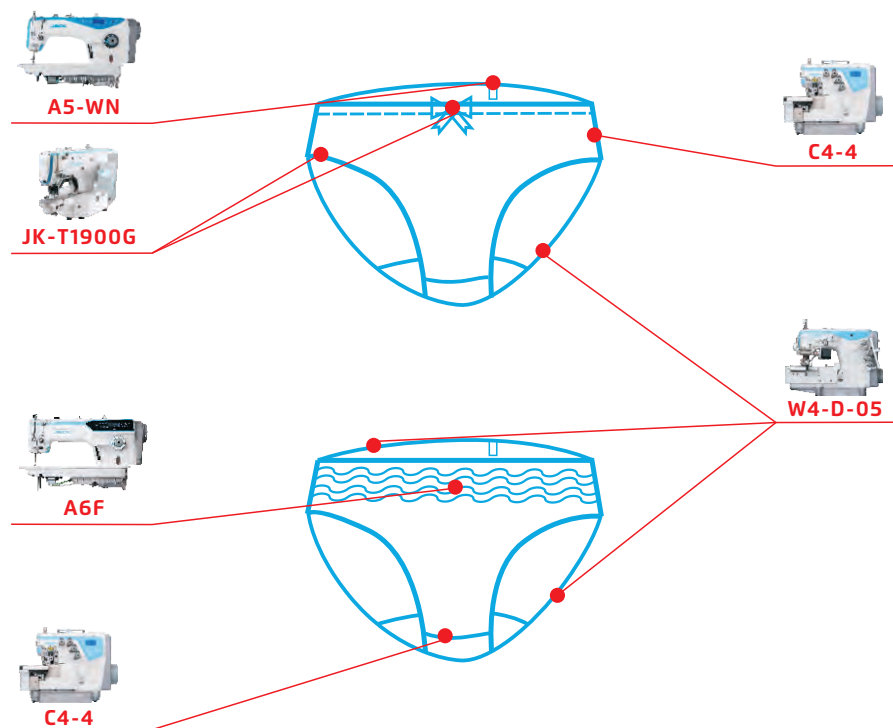


### Dresses

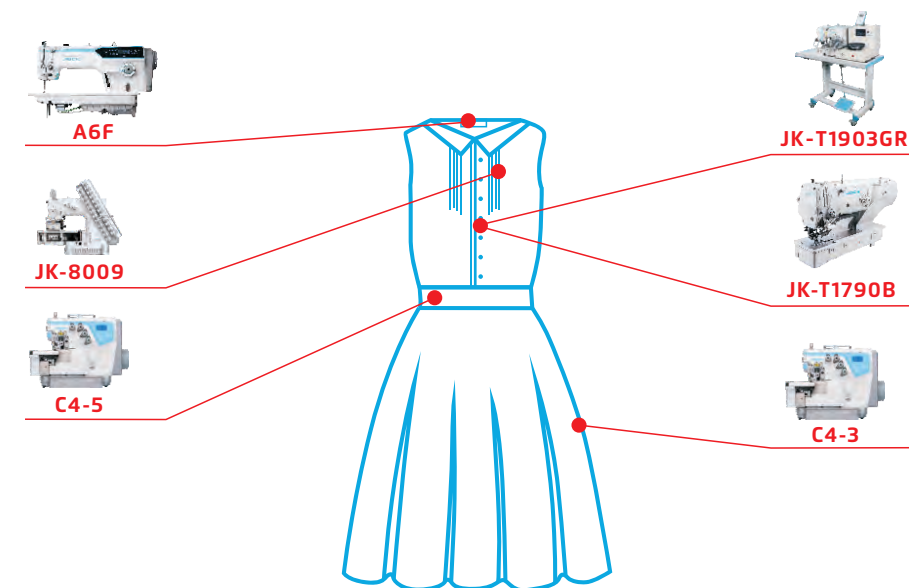

### Polo-shirt

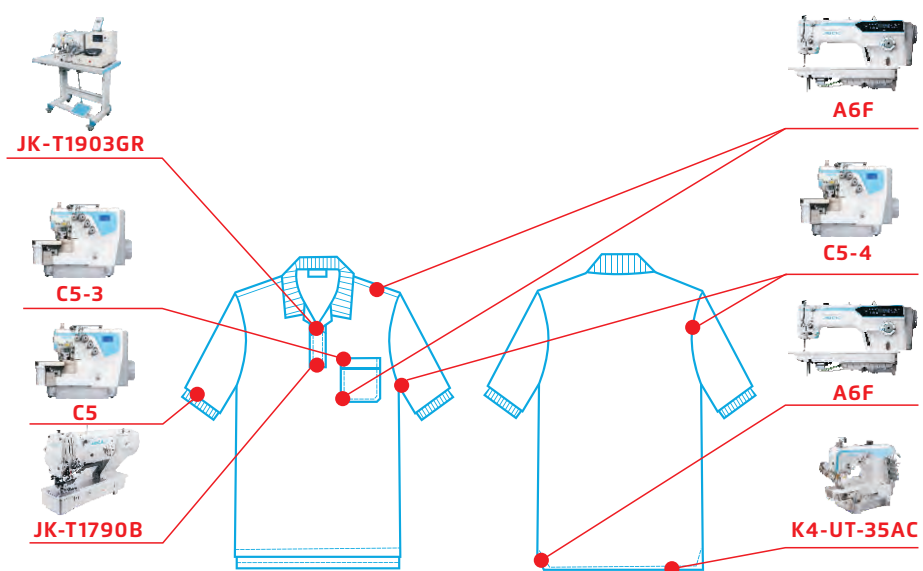


### Bag

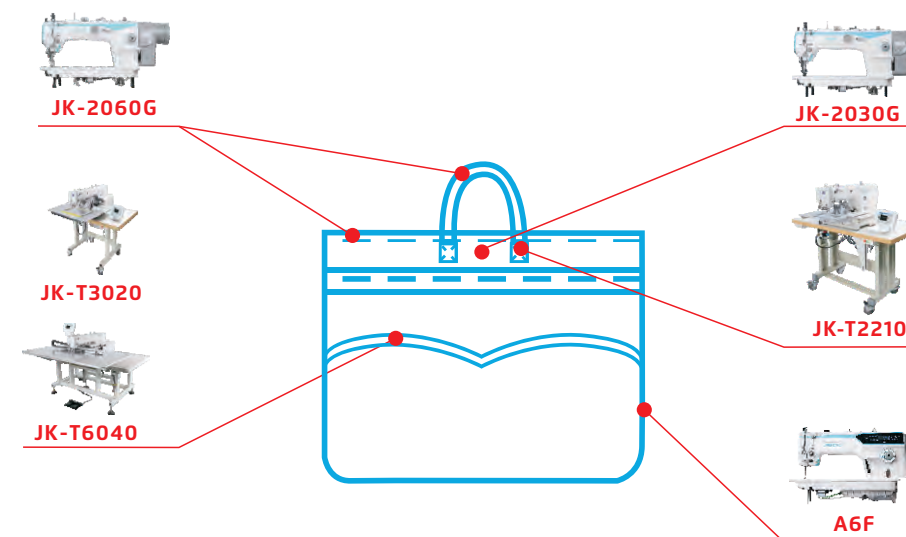




# STITCH TABLE


## Lockstitch

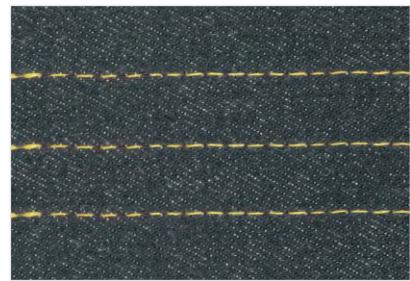


Lockstitch with short thread tail

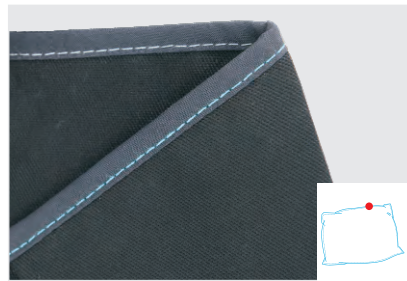


Edge cut and tape binder

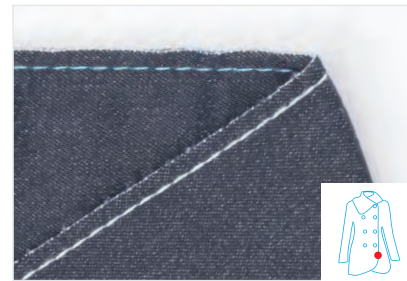


Cutting after sewing

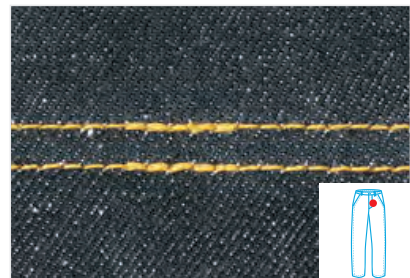


Double needle lock stitch

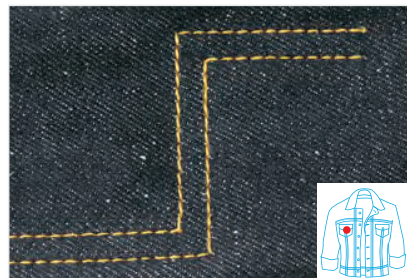

Double needle corner stitch

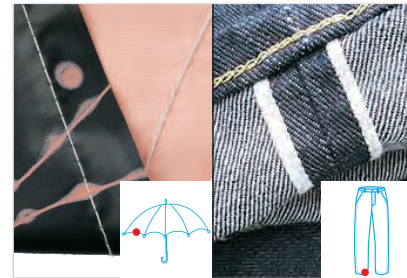

Single needle chain stitch

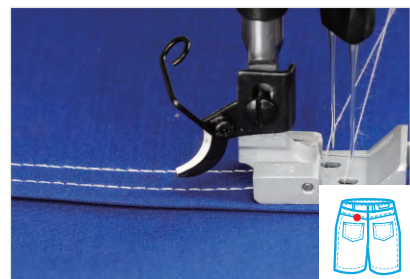

Double needle chain stitch



Triple needle chain stitch



Heavy duty


## Overlock



Pocket double chain stitch



Fabric joint sewing

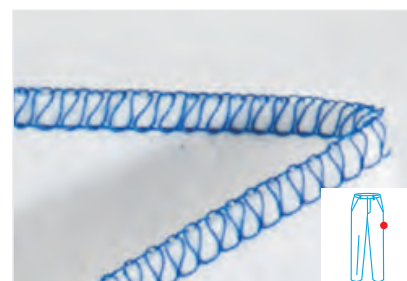

Three threads stitch



Three threads back latching stitch



Three threads baby overlock stitch



Three threads blindstitch hemming




Four threads stitch



Four threads back latching stitch



Four threads shirring stitch

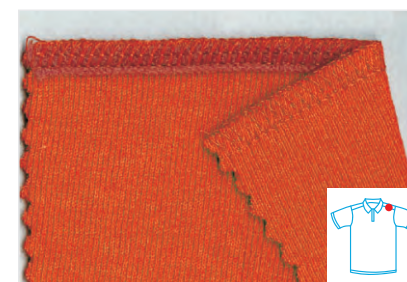

Four thread tape attach stitch




Five threads stitch



Five threads heavy duty stitch



Five threads for attaching tape

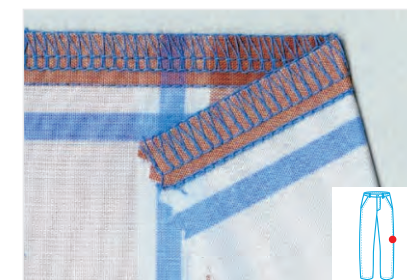


Six threads sewing




Four threads variable top feed




### Four Thread Interlock

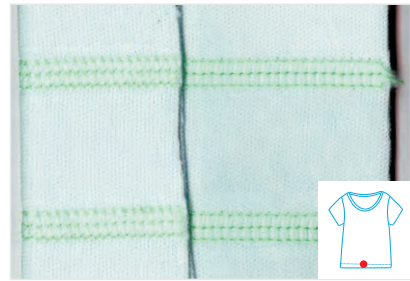

Plain seaming

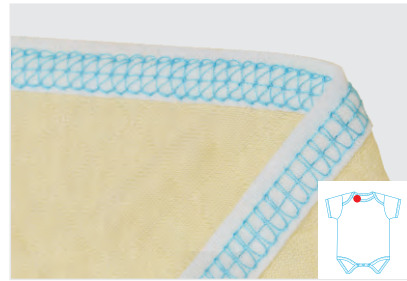


Tape binding

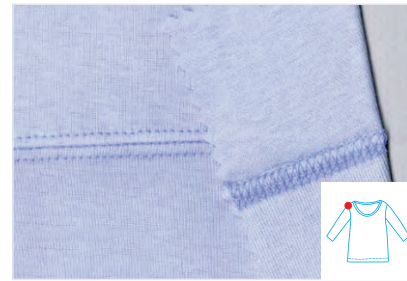


Covering stitch (one side)



Covering stitch

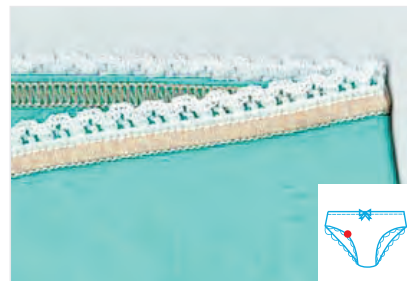

Elastic lace attaching

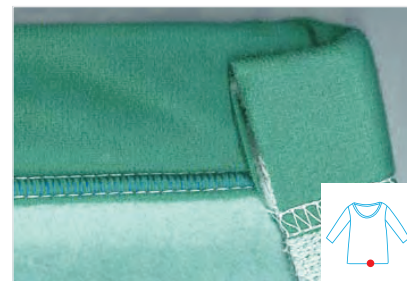


Bottom hemming




Bottom hemming (left cutter)



Cylinder cover stitch

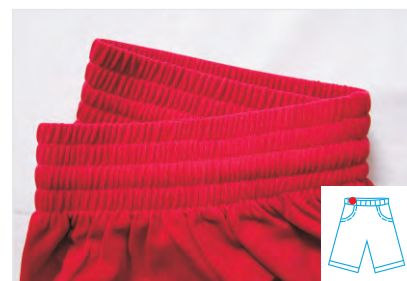


Elastic attaching

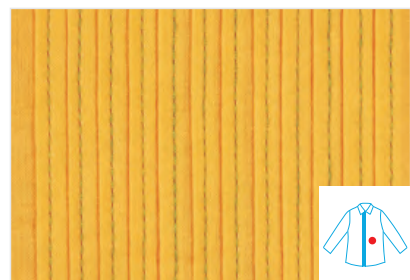

T-shirt folding seaming




Tape attaching

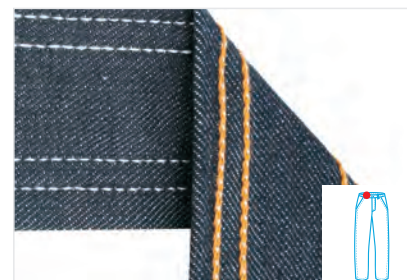


Waist band

### Button Holing/Button Attaching

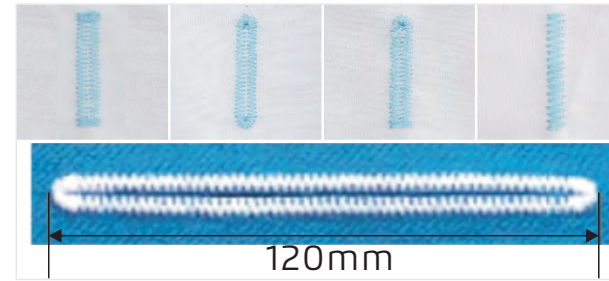


Button holing stitch

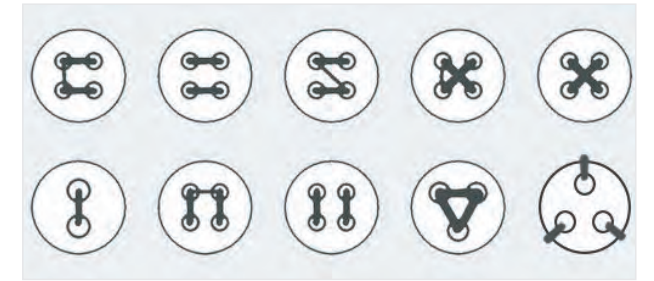

Button attaching stitch


### Bartacking Machine Stitch

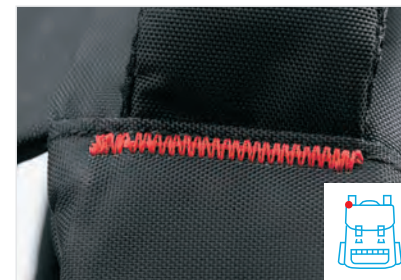


Bartacking stitch




Cap hole stitch

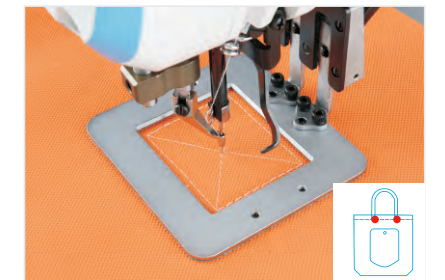


Small pattern

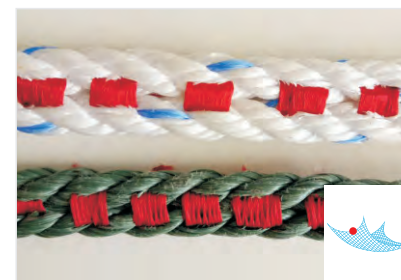

Fishing net

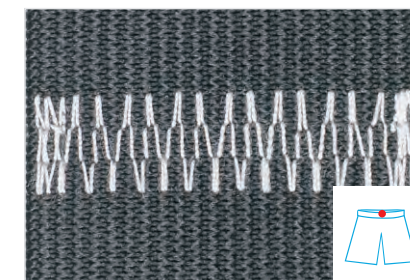


Elastic joint

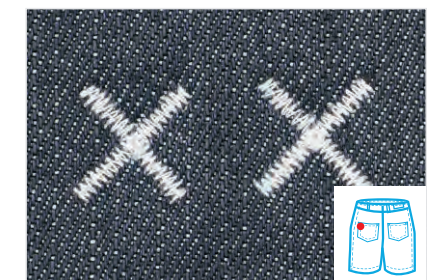


Cross bartacking stitch



Suits bartacking stitch

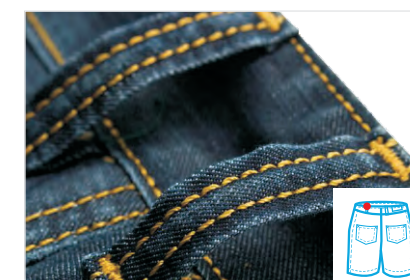

Jeans bartacking stitch

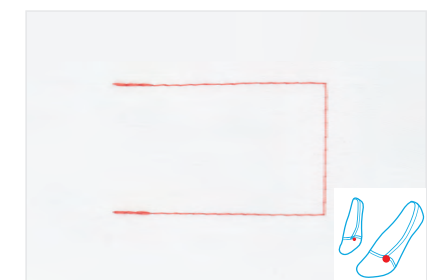

Bartacking for socks




## Pattern Stitch

Apparel



Non-apparel

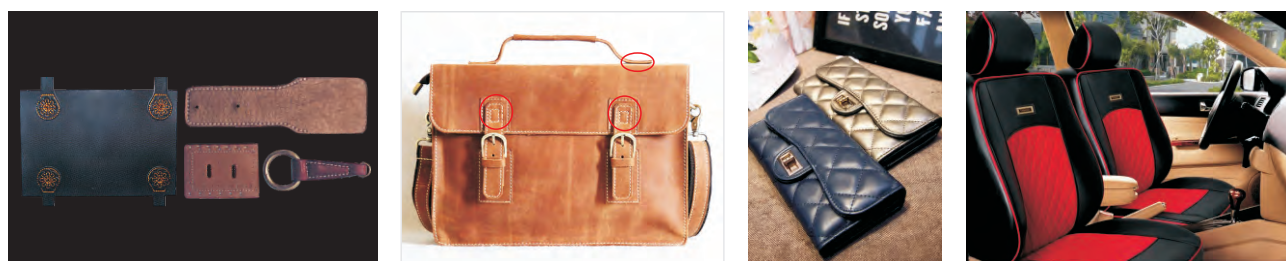

Home textile



Others



## Chain Stitch



Triple needle feed-off-the arm machine




Double needle feed-off-the arm machine

## Placket Samples



Visible placket

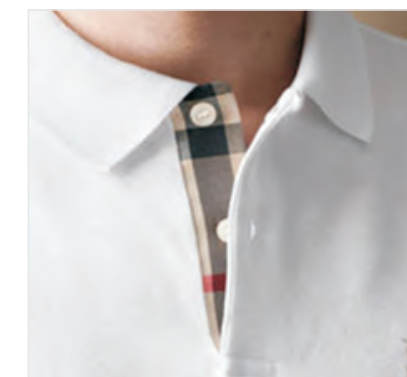

Invisible placket



"V" placket

## Pocket Stitch



Single welt pocket



Double welt pocket



Double welt pocket with flap